

AA Portable Power Corp.

Document Number:

Revision: 3

Document Title: Product Specification of Ni-MH D 8500 Cells

Page 1 of 3

1. SCOPE

This specification governs the performance of the following Nickel-Metal hydride Cylindrical cell and its stack-up battery.

Model: MH- D8500B

Cell Size: D Flat Top ($\phi 32.1^{\pm 0.2} \times 60.0^{\pm 0.5}$)

2. DATA OF STACK UP BATTERIES

All data involves voltage and weight to stack-up battery are equal to the value of unit cell time the number of unit cell which consisted in the stack-up batteries

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries = $1.2V \times 3=3.6V$

3. RATINGS

Description	Unit	Specification	Conditions
Nominal Voltage	V/Cell	1.2	Unit cell
Nominal Capacity	mAh	8500	Standard Charge/Discharge
Standard Charge	mA	850(0.1C)	$T_1=0\sim45^{\circ}\text{C}$ (see Note1)
	Hour	14~16	
Quick Charge	mA	2550 (0.3C)	- $\Delta V=0\sim5\text{mV}/\text{cell}$ or Timer Cutoff=120% nominal capacity or Temp.Cutoff=55°C, $T_1=10\sim45^{\circ}\text{C}$
	Hour	4.0approx (see Note 2)	
Trickle Charge	mA	(0.05C)~(0.1C)	$T_1=0\sim45^{\circ}\text{C}$
Standard discharge	mA	1700 (0.2C)	$T_1= -30\sim60^{\circ}\text{C}$ Humidity: Max.85%
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	°C	-30~65	Discharged state、Humidity、Max.85%
Typical Weight	Gram	165	Unit cell

AA Portable Power Corp.

Document Number:

Revision 3

Document Title: Product Specification of Ni-MH D 8500 Cells

Page 2 of 3

4. PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : $20 \pm 5^\circ\text{C}$

Relative Humidity : $65 \pm 20\%$

Notes: Standard Charge/Discharge Conditions:

Charge: 850 mA(0.1C)×14 hours

Discharge: 1700 mA(0.2C) to 1.0V/cell

Test	Unit	Specification	Conditions	Remarks
Capacity	mAh	≥ 8500	Standard Charge Discharge	up to 3 cycles are allowed
Open Circuit Voltage(OCV)	V/cell	≥ 1.25	Within 1 hour after standard Charge	
Internal Impedance	$\text{m } \Omega / \text{cell}$	≤ 7.0	Upon fully charge(1KHz)	
High Rate Discharge(1C)	minute	≥ 54	Standard Charge, 1 hour rest Before discharge by 10000mA (1C)to 1.0V/cell	up to 3 cycles are allowed
Overcharge	/	No leakage nor explosion	850mA(0.1C)Charge 28 days	
Charge Retention	mAh	$\geq 5950(70\%)$	Standard Charge, Storage: 28 days, Standard Discharge	
IEC Cycle Life	Cycle	≥ 500	IEC285(1993)4.4.1	(see Note 3)
Accelerated Cycle Life	Cycle	≥ 400	Charge:2550mA(0.3C) Discharge: 42500mA(0.5C) To 1.0V/cell, End-of:80% nominal Capacity	Cycling charging cut-off condition: - $\Delta V=0\sim 5\text{mV/cell}$ and Timer cut-off= 110% Nominal capacity Input and Temp.cutoff= 55°C
Leakage		No leakage nor deformation	Fully charged at 0.3C for 4.0 hrs Stand for 14 days	
Vibration Resistance		Change of voltage should be under 0.02V/cell,Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs,then leave for 24hrs,check battery before/after vibration, amplitude 1.5mm Vibration 3000 CPM Any direction for 60mins.	
Impact Resistance		Change of voltage should be under 0.02V/cell Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs Then leave for 24hrs,check bat-before/after dropped, Height 50cm Wooden board(thickness 30mm) Direction not specified,3 times.	

AA Portable Power Corp.

Document Number:

Revision: 3

Document Title: Product Specification of Ni-MH D8500 Cells

Page 3 of 3

5. CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6. EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

7. WARRANTY

3months limited warranty against workmanship and material defects.

8. CAUTION

(1)Reverse charging is not acceptable.

(2)Charge before use. The cells/batteries are delivered in an uncharged state.

(3)Do not charge/discharge with more than our specified current.

(4)Do not short circuit the cell/battery Permanent damage to the cell/battery may result.

(5)Do not incinerate or mutilate the cell/battery.

(6)Do not solder directly to the cell/battery.

(7)the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.

(8)store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.

Notes:

(1) T_1 : Ambient Temperature.

(2) Approximate charge time from discharged state, for reference only.

(3) IEC285(1993)4.4.1 Cycle Life:


Cycle No.	Charge	Rest	Discharge
1	0.1C×16h	None	0.25C×2h20min
2-48	0.25C×3h10min	None	0.25C×2h20min
49	0.25C×3h10min	None	0.25C to 1.0V/cell
50	0.1C×16h	1-4h	0.2C to 1.0V/cell
Cycles 1 to so shall be repeated until the discharge duration on any 50th Cycle becomes less than 3 h.			

AA Portable Power Corp.

MODEL No: MH-D10000B

Description: 8500mAh D SIZE NI-MH


Specification	
Nominal Capacity 额定容量	8500 mAh
Nominal Voltage 额定电压	1.2 V
Charge current 充电电流	Standard 标准 850mA
Quick 快充	2550 mA
Charge time 充电时间	Standard 标准 14~16 Hrs
Quick 快充	4.0 Hrs
Ambient Temperature 使用温度	Charge 充电 Standard 标准 0°C~45°C
Quick 快充	10°C~45°C
Discharge 放电	-30°C~60°C
Storage 储存	-30°C~65°C
Internal Impedance(mΩ) (After Charge) 充电后内阻	Max≤7.0
Weight 重量	165g

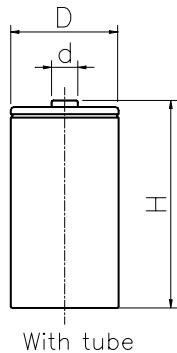


Dimension of the cell

D	Φ 32.1±0.2
d	Φ 8.0±0.05
H	60.5±0.5


Charge(充 电)

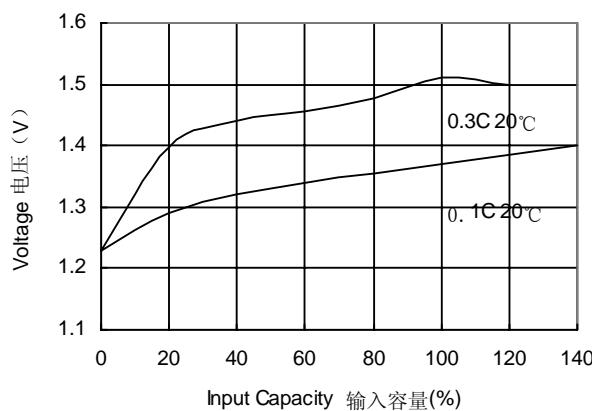

Discharge at high rate(高倍率放电)

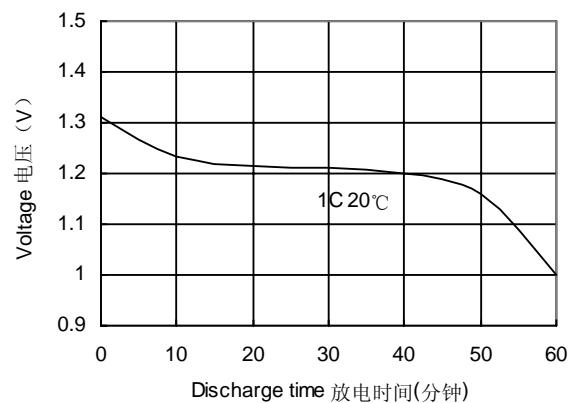

Discharge at low rate(低倍率放电)

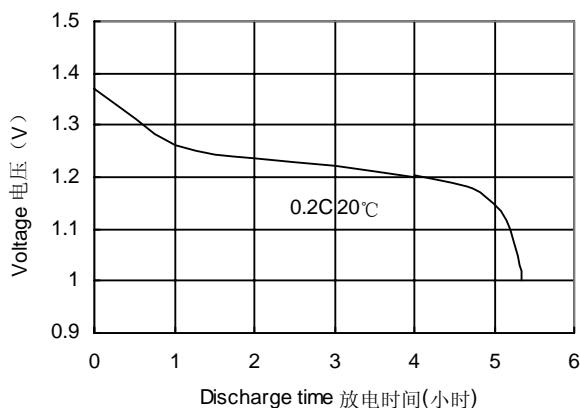

Charge Retention(荷电保持能力)

