
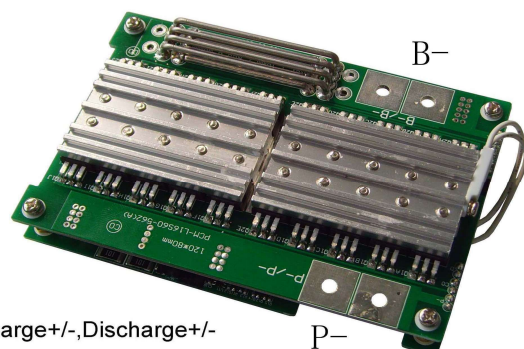
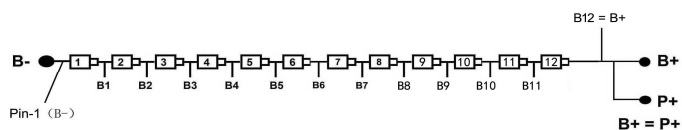


Protection Circuit Module Specifications For 38.4V LiFePO4 Battery Packs

Model: PCM-LFP38.4V60A

No.	Test item	Criterion	
1	Voltage	Charging voltage	DC: 43.2V CC/CV (3.6V/1cell)
		Balance voltage for single cell	3.6V±0.03V
2	Current	Balance current for single cell	72mA±5mA
		Current consumption for single cell	≤20 μ A
		Maximal continuous discharging current	60A
		Maximal continuous discharging current	60A
3	Over charge Protection (single cell)	Over charge detection voltage	3.90±0.025V
		Over charge detection delay time	0.5S—2S
		Over charge release voltage	3.80±0.05V
4	Over discharge protection (single cell)	Over discharge detection voltage	2.0±0.05V
		Over discharge detection delay time	100—250ms
		Over discharge release voltage	2.3±0.1V
5	Over current protection	Over current detection voltage	0.65±0.1V
		Over current detection current	130~170A
		Detection delay time	5ms—20ms
		Release condition	Cut load
6	Short protection	Detection condition	Exterior short circuit
		Detection delay time	200-600us
		Release condition	Cut load
7	Resistance	Protection circuitry (B- TO P-)	≤30mΩ
8	Temperature	Operating Temperature Range	-40~+85℃
		Storage Temperature Range	-40~+125℃
		Over Temperature protection (discharge)	90±5℃

L120*W80*T30mm

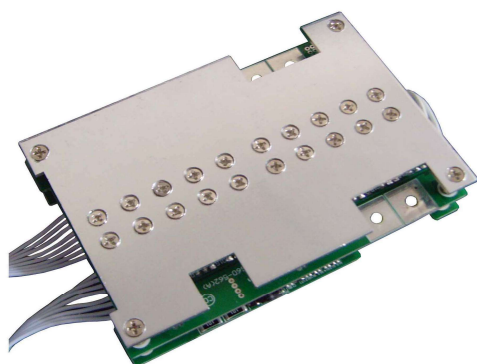

P+, P- = Charge+/-, Discharge+/-