


Specification & Instruction of DC Smart Charger CH-LDC3705



AA PC

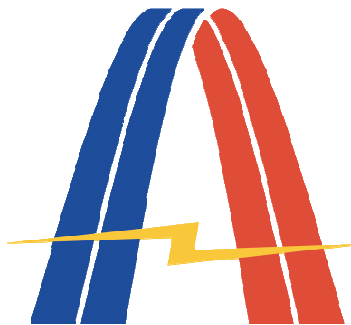


www.BatterySpace.com

AA Portable Power Corp

Specification:

Feature	<ul style="list-style-type: none"> Designed for 3.7V lithium rechargeable battery with capacity $\geq 500\text{mAh}$ Input Power: 12.6V - 14V DC (male auto charger adaptor) Output Power: 4.2V DC, 0.5A (5.5 x 2.1 x 10 mm male barrel connector)
Function	<ul style="list-style-type: none"> CC-CV Charging mode Automatic voltage detection with LED indicator (red/green) during charging process Charging: Red Fully charged: Green Automatic cut-off charging function by IC
Safety Protection	<ul style="list-style-type: none"> The protection is built in the circuit of the charger to prevent over load, and short circuit
Dimension	L 4.3" X W 2.0" X H 1.4"
Weight	2.5 oz (71g)

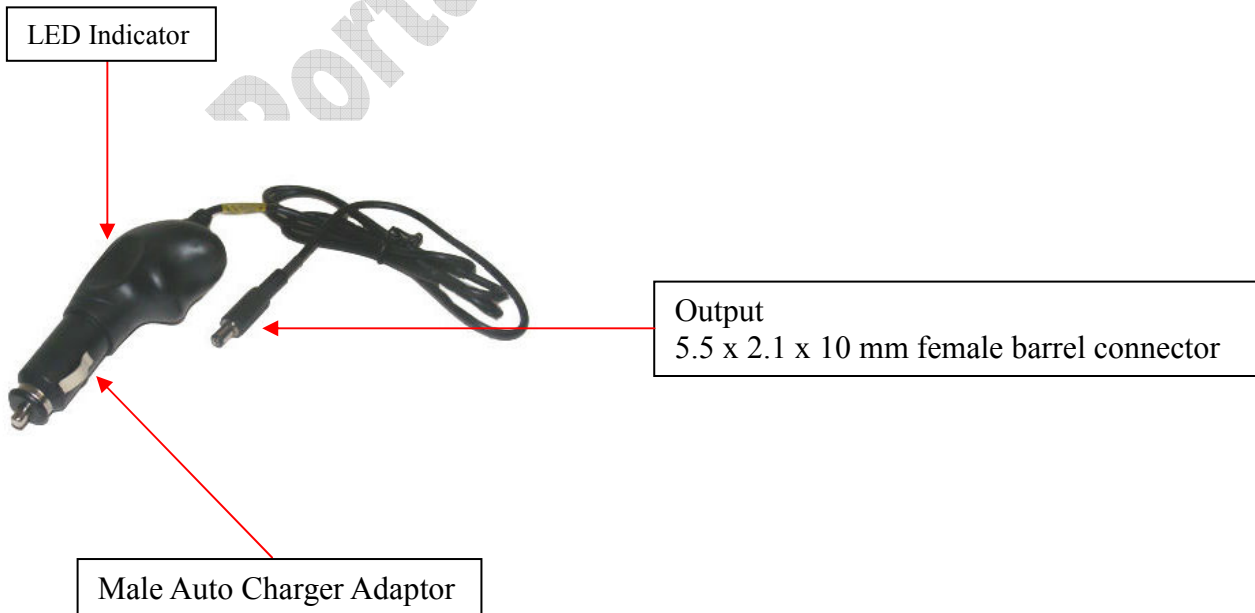

Instruction:

Please carefully read the following instruction before you start to use this charger.

Caution:

- This charger is only for Indoor use
- The charger shall be placed on a fixed horizontal surface when the charger is operated
- Avoid storing or operating the charger in highly humid place or any place with inflammable good
- Do not cover the charger when the charger is operated
The ambient temperature shall not excess 40 °C
- Do not charge the battery on the list below
Voltage < 3.7V, or Voltage > 3.7V
Capacity < 500mAh
- Battery must be made by high drain current cell
- Completely plug the power cord into AC power resource
Do not expose any metal part of the power cord during operation
Do not use your hand or any of your body to touch the metal part of the power when you connect the power to the charger
- Do not disassembly the charger any time
- AA Portable Power is not responsible for any damage caused by any misuse

Operation Steps:

1. Connect the battery to the output of charger (5.5 x 2.1 x 10 mm male barrel connector) with correct polarity
2. Plug the male auto charger adaptor into the DC power resource
3. When it is in charging process, the LED indicator turns Red. When the battery is fully charged, the LED indicator will be Green
4. The charging time is variable depends on the battery