


Specification & Instruction of Smart Gang Charger CH-GL14807-6

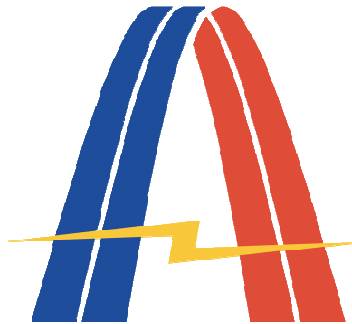


www.BatterySpace.com

AA Portable Power Corp

Specification:

Feature	<ul style="list-style-type: none"> Designed for 14.8V lithium rechargeable battery with capacity $\geq 700\text{mAh}$ Input Power: 100 - 240V AC, 120W Max, 50/60Hz (USA) Output Power: 16.8V DC, 0.7A (5.5×2.1×10mm male barrel connector) for each channel 5 individual channels
Function	<ul style="list-style-type: none"> CC-CV Charging mode Automatic voltage detection with LED indicator (red/green) during charging process Charging: Red Fully charged: Green
Safety Protection	<ul style="list-style-type: none"> The protection is built in the circuit of the charger to prevent over-voltage, and short circuit
Dimension	L 8.9" X W 5.8" X H 2.3"
Weight	2lb 7oz (1100g)

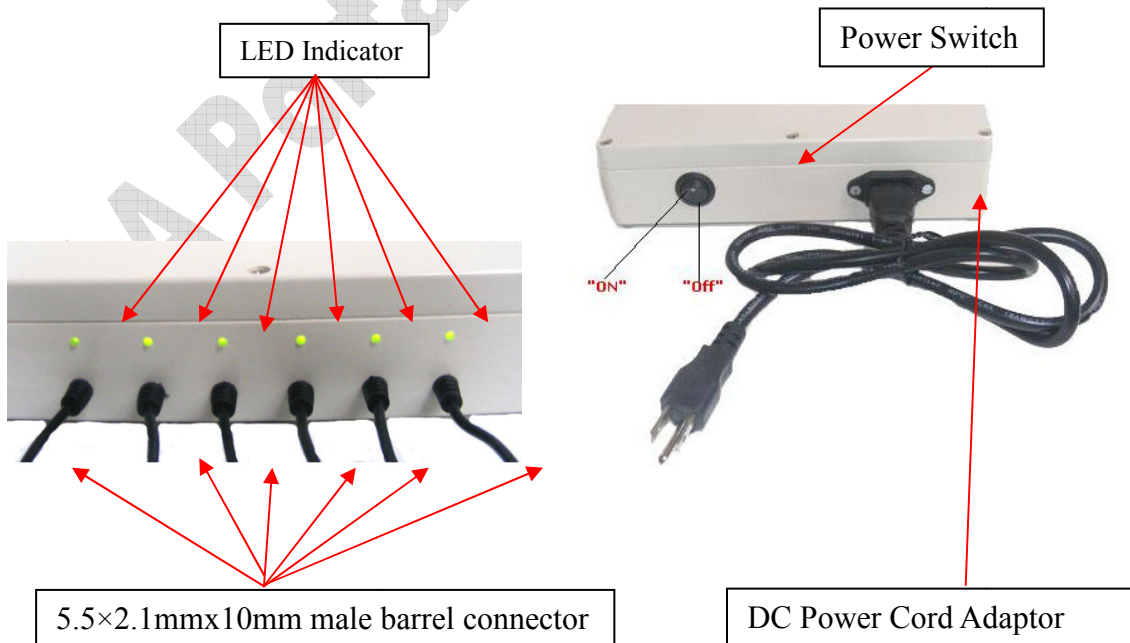



Instruction:

Please carefully read the following instruction before you start to use this charger.

Caution:

- This charger is only for Indoor use
- The charger shall be placed on a fixed horizontal surface when the charger is operated
- Avoid storing or operating the charger in highly humid place or any place with inflammable good
- Do not cover the charger when the charger is operated
The ambient temperature shall not excess 40 °C
- Do not charge the battery on the list below
Voltage < 14.8V, or Voltage > 14.8V
Capacity < 700mAh
- Battery must be made by high drain current cell
- Completely plug the power cord into AC power resource
Do not expose any metal part of the power cord during operation
Do not use your hand or any of your body to touch the metal part of the power when you connect the power to the charger
- Do not disassembly the charger any time
- AA Portable Power is not responsible for any damage caused by any misuseage

Operation Steps:

1. Connect transfer cable (5.5mm x 2.5mm x 10mm barrel female) to the output of the charger (5.5mm x 2.5mmx10mm barrel male)
2. Connect the battery to the transfer cable (alligator clips) with correct polarity (Red cable connects to positive, Black cable connects to negative)
3. Insert power cord to the power cord adaptor
4. Plug the power cord into the AC power resource
5. Turn on the power Switch
6. When it is in charging process, the LED indicator turns Red. When the battery is fully charged, the LED indicator will be Green
7. The charging time is variable depends on the battery