

AA Portable Power Corp

SPECIFICATION FOR MODEL NO. : H01480030-XX-D1

Address: 860 S 19th St, Unit A, Richmond, CA, 94804

TEL: (510) 525-2328

FAX: (510) 439-2808

POSTCODE: 94804 WEB: <http://www.batteryspace.com>

DESCRIPTION		SPECIFICATION		HCT Technology	
MODEL NO.		H01480030-XX-D1		DOCUMENT NO.	
PREPARED BY	DESIGNED BY	CHECKED BY	APPROVED BY	ISSUED DATE	Aug-06-2008
Henry	Henry			REV.	A

Revision History

Rev	Description	Date
A0	Original	Aug-06-2008

1.0 INPUT.....	4
1.1 Voltage.....	4
1.2 Frequency.....	4
1.3 Current.....	4
1.4 Inrush current.....	4
1.5 Power efficiency.....	4
2.0 OUTPUT.....	4
2.1 charge curve.....	4
2.2 Led display.....	4
3.0 PROTECTION.....	4
3.1 Over voltage protection.....	4
3.2 Short circuit protection.....	5
4.0 HI-POT:.....	5
4.1 HI-POT.....	5
5.0 ENVIRONMENT:.....	5
5.1 Ambient operation temperature.....	5
5.2 Ambient operation relative humidity.....	5
5.3 Ambient storage temperature.....	5
5.4 Ambient storage relative humidity.....	5
6.0 DROP TEST.....	5
7.0 VIBRATION TEST.....	5
8.0 MTBF.....	5
9.0 OUTLINE.....	5

1.0 INPUT

1.1 Voltage

Minimum	Normal	Maximum	Unit
100	115/230	240	Vrms

1.2 Frequency

47Hz~63Hz

1.3 Current

3.15A.(MAX)

1.4 Inrush current


115V/40A(max.), 230V/80A(max.)
at 25°C at cold start.

1.5 Power efficiency

80% (min.) at full load, 110Vac or 230Vac 50Hz.

2.0 OUTPUT

2.1 Charge curve

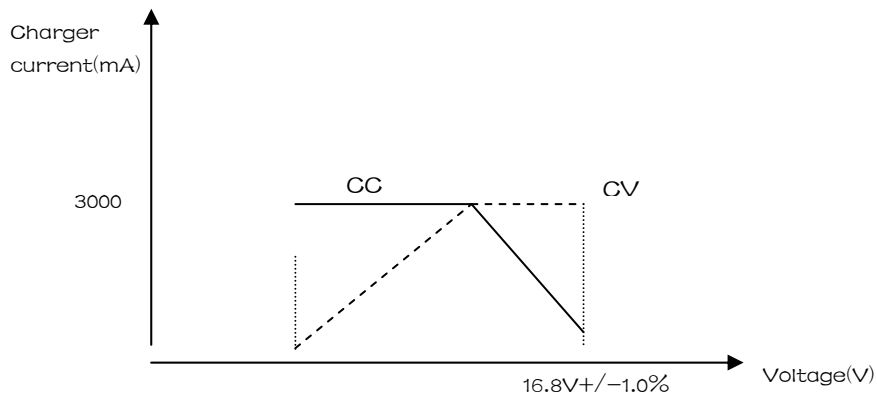

2.1.1 Its output voltage is 16.8+/-1%V at standby.

2.2 Led display

Green on standby

Red on charging

Green on full charge when charging current drop to 300+/-15mA.

3.0 PROTECTION

3.1 Over voltage protection

Output over voltage protection with zener diode.

3.2 Short circuit protection

The output short to ground, it will auto-recovery without damage.

4.0 HI-POT

4.1 HI-POT

4.1.1 P~S:1800Vac 3S,the leakage current is lower than 10mA;;

5.0 ENVIRONMENT:

5.1 Ambient operation temperature

0℃ to +40℃

5.2 Ambient operation relative humidity

20% to 85%

5.3 Ambient storage temperature

-40℃ to +70℃

5.4 Ambient storage relative humidity

10% to 95%

6.0 DROP TEST

6.1 Freely drop the wooden board from the height of 75cm for two times per side(front/back/left/right).

7.0 VIBRATION TEST

7.1 Vibration frequency:5-60-5Hz with 10 octave/min@2.1G

7.2 Three circles per axis(X,Y,Z) for 10minutes

8.0 MTBF

40,000 hours base on bellcore TR332 document required at 25℃.

9.0 Outline

9.1.Outline dimension: 155L X 85W X 46(H) mm MAX;

9.2.Profile:surface smooth ,no scar and mechanical damage.