

**SPECIFICATION FOR
MODEL NO. : CHUN-400
Ni-MH/Ni-Cd SMART CHARGER**

AA Portable Power Corp

Address: 2700 Rydin Road, Unit C, Richmond, CA, 94804, USA

Tel: 510-525-2328

Fax: 510-4392808

Website: <http://www.batteryspace.com>

Rev	Description	Date
A0	Original	Mar-05-2007

1.0 INPUT	4
1.1 Voltage.....	4
1.2 Frequency.....	4
1.3 Current.....	4
1.4 power factor.....	4
1.5 Inrush current.....	4
1.6 Power efficiency.....	4
2.0 OUTPUT	4
2.1 charge curve.....	4
2.2 Led display.....	4
3.0 PROTECTION	5
3.1 Over voltage protection.....	5
3.2 Short circuit protection.....	5
3.3 Output reverse input protection.....	5
3.4 Over temperature protection.....	5
4.0 HI-POT:	5
4.1 HI-POT.....	5
5.0 ENVIRONMENT:	5
5.1 Ambient operation temperature.....	5
5.2 Ambient operation relative humidity.....	5
5.3 Ambient storage temperature.....	5
5.4 Ambient storage relative humidity.....	5
6.0 DROP TEST	6
7.0 VIBRATION TEST	6
8.0 MTBF	6
9.0 DIMENSION	6

1.0 INPUT

1.1 Voltage

Minimum	Normal	Maximum	Unit
100	115/230	240	Vrms

1.2 Frequency

47Hz~63Hz

1.3 Current

2.0A.(MAX)

1.3 Power factor

Power factor:more than 90% at 240Vac.

1.4 Inrush current


115V/40A(max.), 230V/80A(max.)
at 25°C at cold start.

1.5 Power efficiency

75% (min.) at full load, 115Vac 60Hz.

2.0 OUTPUT

2.1 Charge curve

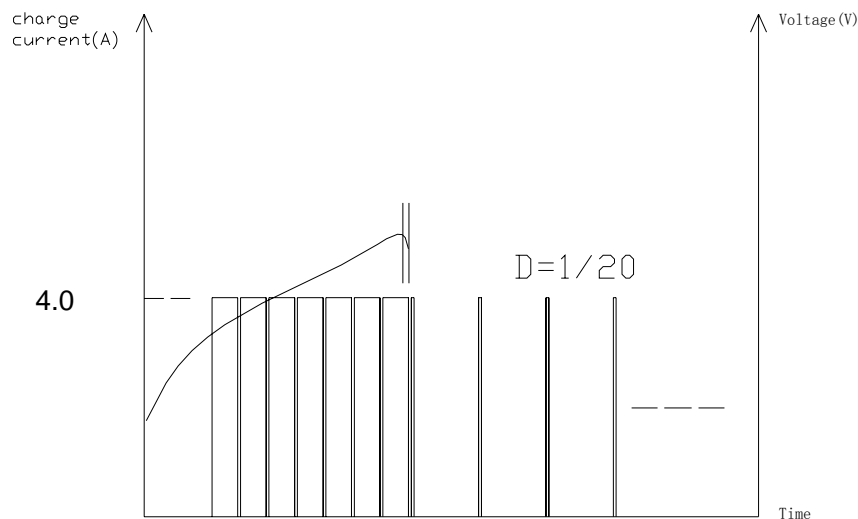

2.1.1 This charger can charge 16~22pcs series Ni-MH/Ni-Cd battery.

2.1.2 Its output voltage is 0V at standby.

2.1.3 End charge by $-\Delta V$ (about 5mV) detection, after detection $-\Delta V$, It will turn to Trickle-off charge, its charger current is fast charging current of 1/20.

2.2 Led display

- 2.1.1 Red and green led flash for 2 times after the unit connect AC source, then both off.
 Led off on standby
 Red led on charging
 Green led on full charge
 Red flash on error status

3.0 PROTECTION

3.1 Over voltage protection

Sense level	Over voltage
+36V	42Vmax.

3.2 Short circuit protection

The output short to ground, it will auto-recovery without damage.

3.3 Output reverse input protection

When output reverse input, the unit and the battery will be no damage.

3.4 Over temperature protection

When the temperature of the battery is more than 65°C, the charger will Turn to trickle off charging mode.

4.0 HI-POT

4.1 HI-POT

P~S:3300Vac 3S, the leakage current will be lower than 10mA.

5.0 ENVIRONMENT:

5.1 Ambient operation temperature

0°C to +40°C

5.2 Ambient operation relative humidity

20% to 85%

5.3 Ambient storage temperature

-40°C to +70°C

5.4 Ambient storage relative humidity

10% to 95%

6.0 DROP TEST

6.1 Put the unit on the wooden, freely drop from the height of 1.3m with 500g ball, 2 times per side.

7.0 VIBRATION TEST

**7.1 Vibration frequency:5-60-5Hz with 10 octave/min@2.1G
Three circles per axis(X,Y,Z) for 10minutes**

8.0 MTBF

40,000 hours base on bellcore TR332 document required at 25°C.

11.0 Dimension

Outline dimension : 155L X 85W X 46(H) mm MAX;