


Specification & Instruction of Universal Smart Charger CH-UN130

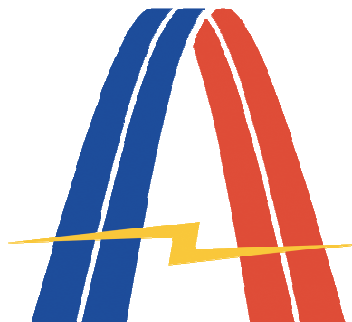


www.BatterySpace.com

AA Portable Power Corp

Specification:

<p>Feature</p>	<ul style="list-style-type: none"> • Designed for 2.4V - 7.2V NiNH/NiCd battery pack with capacity which is more than 600mAh • Input Power: 100V - 240V AC worldwide power support • Output Power: 2.4V - 7.2V, 0.6A/1.2A (various options) • Best Performance on 4.8V - 7.2V NiNH/NiCd battery • Can be utilized as a battery charger module for any DC device
<p>Function</p>	<ul style="list-style-type: none"> • Automatic voltage detection with LED indicator (red/green) during charging process Activating: Alternatively blinking red and green twice Charging: Red Fully charged: Blinking Green • Automatic cut-off charging function by MCU • Two adjustable current level (0.6A/1.2A) <i>0.6A for the battery which has more than 600mAh or equal to 1200mAh</i> <i>1.2A for the battery which has more than 1200mAh</i>
<p>Safety Protection</p>	<ul style="list-style-type: none"> • A fuse is installed in the circuit of the charger to prevent over current, short circuit, and reverse polarity
<p>Dimension</p>	<p>L 1.5" X W 2.5" X H 5.5"</p>
<p>Weight</p>	<p>14oz (397g)</p>

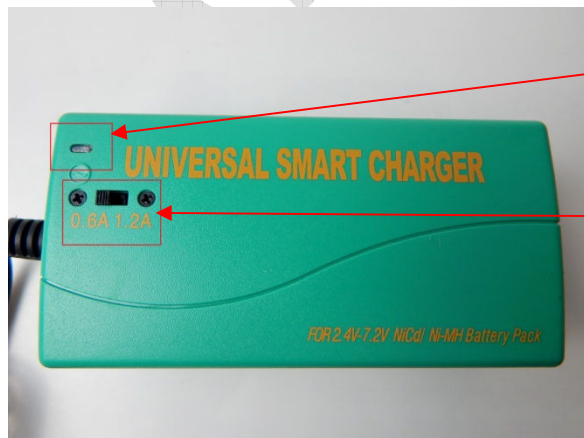

LED Indicator

0.6A/1.2A Switch

Instruction:

Please carefully read the following instruction before you start to use this charger.

Caution:

- This charger is only for Indoor use
- The charger shall be placed on a fixed horizontal surface when the charger is operated
- Avoid storing or operating the charger in highly humid place or any place with inflammable good
- Do not cover the charger when the charger is operated
The ambient temperature shall not excess 40 °C
- Do not charge the battery on the list below
Voltage < 2.4V, or Voltage > 7.2V
Capacity < 600mAh
- Battery must be made by high drain current cell
- Completely plug the power cord into AC power resource
Do not expose any metal part of the power cord during operation
Do not use your hand or any of your body to touch the metal part of the power when you connect the power to the charger
- Do not disassembly the charger any time
- AA Portable Power is not responsible for any damage caused by any misuse

Operation Steps:

1. Connect the battery to the output of charger with correct polarity (Red cable connects to positive, Black cable connects to negative)
2. Select proper constant current mode (see specification) by switch
3. Connect the power cord to the charger
4. Plug the power cord into the AC power resource
5. At the beginning of the charging process, the LED indicator will alternatively blink Red and Green twice. When it is in charging process, the LED indicator turns Red. When the battery is fully charged, the LED indicator will blink Green
6. The charging time is variable depends on the battery