


Specification & Instruction of Smart Charger CH-LF3845

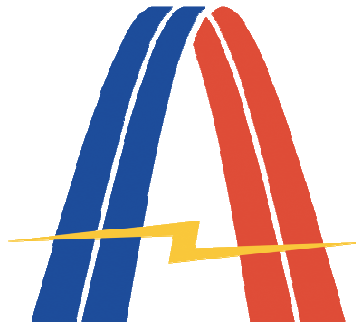

www.BatterySpace.com

AA Portable Power Corp

Specification:

Feature	<ul style="list-style-type: none"> Designed for 38.4V LiFePO₄ rechargeable battery with capacity $\geq 5.0\text{Ah}$ Input Power: 100V - 240V AC, 216W Max, 50/60Hz Output Power: 43.2V DC, 5.0A Max
Function	<ul style="list-style-type: none"> CC-CV Charging mode Automatic voltage detection with LED indicator (red/green) during charging process Power On: Power LED1 Red Charging: Charge LED2 Red Fully charged: Charge LED2 Green Automatic cut-off charging function by IC
Safety Protection	<ul style="list-style-type: none"> The protection is built in the circuit of the charger to prevent over current, over voltage, reverse polarity, and short circuit Note: Reverse polarity may burn the fuse
Dimension	L 7.4" X W 3.6" X H 2.0"
Weight	1.0lb 13.8Oz (850g)



Power Cord Adaptor
 100V - 240V AC, 216W Max, 50/60Hz



Fan

Output alligator clips

Fuse

LED Indicator

Instruction:

Please carefully read the following instruction before you start to use this charger.

Caution:

- This charger is only for Indoor use
- The charger shall be placed on a fixed horizontal surface when the charger is operated
- Avoid storing or operating the charger in highly humid place or any place with inflammable good
- Do not cover the charger when the charger is operated
The ambient temperature shall not exceed 40 °C
- Do not charge the battery on the list below
Voltage < 34.8V, or Voltage > 34.8V
Capacity < 5.0Ah
- Battery must be made by high drain current cell
- Completely plug the power cord into AC power resource
Do not expose any metal part of the power cord during operation
Do not use your hand or any of your body to touch the metal part of the power when you connect the power to the charger
- Do not disassembly the charger any time
- AA Portable Power is not responsible for any damage caused by any misuse

Operation Steps:

1. Insert the power cord into power cord adaptor on the charger
2. Plug the AC power cord into the AC power resource
3. Connect the battery to the output of the charger (alligator clips) with correct polarity (Red cable connects to positive, Black cable connects to negative)
Note: Reverse polarity may burn the fuse
4. When the power is on without connecting battery, the Power LED1 will be Red. When it is in charging process, the Charge LED2 turns Red.
When the battery is fully charged, the Charge LED2 will be Green
Note: When it is short LED2 will be Red
5. The charging time is variable depends on the battery