

# AA Portable Power Corp

---

## SPECIFICATION FOR MODEL NO. : H03360010-US-1

Address: 860 S 19th St, Unit A, Richmond, CA, 94804

TEL: (510) 525-2328

FAX: (510) 439-2808

POSTCODE: 94804      WEB: <http://www.batteryspace.com>

DESCRIPTION		SPECIFICATION		HCT Technology	
MODEL NO.		H03360010-US-1		DOCUMENT NO.	
PREPARED BY	DESIGNED BY	CHECKED BY	APPROVED BY	ISSUED DATE	Aug-06-2008
Henry	Henry			REV.	A

Revision History

Rev	Description	Date
A0	Original	Aug-06-2008

<b>1.0 INPUT.....</b>	<b>4</b>
1.1 Voltage.....	4
1.2 Frequency.....	4
1.3 Current.....	4
1.4 Inrush current.....	4
1.5 Power efficiency.....	4
<b>2.0 OUTPUT.....</b>	<b>4</b>
2.1 charge curve.....	4
2.2 Led display.....	4
<b>3.0 PROTECTION.....</b>	<b>4</b>
3.1 Over voltage protection.....	4
3.2 Short circuit protection.....	5
3.3 Output reverse input protection.....	5
<b>4.0 HI-POT:.....</b>	<b>5</b>
4.1 HI-POT.....	5
<b>5.0 ENVIRONMENT:.....</b>	<b>5</b>
5.1 Ambient operation temperature.....	5
5.2 Ambient operation relative humidity.....	5
5.3 Ambient storage temperature.....	5
5.4 Ambient storage relative humidity.....	5
<b>6.0 DROP TEST.....</b>	<b>5</b>
<b>7.0 VIBRATION TEST.....</b>	<b>5</b>
<b>8.0 MTBF.....</b>	<b>5</b>
<b>9.0 OUTLINE.....</b>	<b>5</b>

## 1.0 INPUT

### 1.1 Voltage

Minimum	Normal	Maximum	Unit
100	115/230	240	Vrms

### 1.2 Frequency

47Hz~63Hz

### 1.3 Current

1.0A.(MAX)

### 1.4 Inrush current


115V/40A(max.), 230V/80A(max.)  
at 25°C at cold start.

### 1.5 Power efficiency

80% (min.) at full load, 110Vac or 230Vac 50Hz.

## 2.0 OUTPUT

2.1 Charge curve; CC @1.0A, CV@ 33.6 +/- 1%V, x axis = voltage, y axis = current

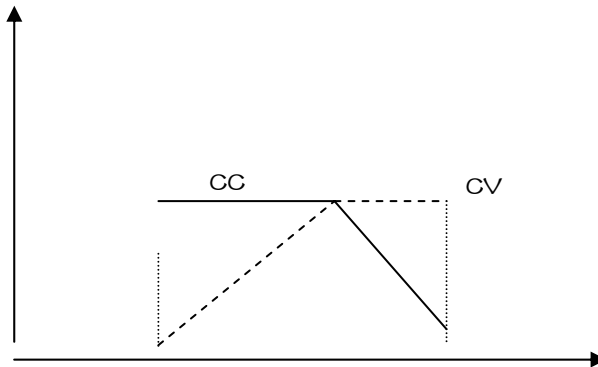

2.1.1 Its output voltage is 33.6+/-1%V at standby.

### 2.2 Led display

Green on standby

Red on charging

Green on full charge when charging current drop to 150+/-15mA.

## 3.0 PROTECTION

### 3.1 Over voltage protection

Output over voltage protection with zener diode.

### **3.2 Short circuit protection**

The output short to ground, it will auto-recovery without damage.

### **3.3 Output reverse input protection**

When output reverse input,the unit and the battery will be no damage.

## **4.0 HI-POT**

### **4.1 HI-POT**

4.1.1 P~S:1800Vac 3S,the leakage current is lower than 10mA;;

## **5.0 ENVIRONMENT:**

### **5.1 Ambient operation temperature**

0℃ to +40℃

### **5.2 Ambient operation relative humidity**

20% to 85%

### **5.3 Ambient storage temperature**

-40℃ to +70℃

### **5.4 Ambient storage relative humidity**

10% to 95%

## **6.0 DROP TEST**

6.1 Freely drop the wooden board from the height of 75cm for two times per side(front/back/left/right).

## **7.0 VIBRATION TEST**

7.1 Vibration frequency:5-60-5Hz with 10 octave/min@2.1G

7.2 Three circles per axis(X,Y,Z) for 10minutes

## **8.0 MTBF**

40,000 hours base on bellcore TR332 document required at 25℃.

## **9.0 Outline**

9.1.Outline dimension: 120L X 60W X 38(H) mm MAX;

9.2.Profile:surface smooth ,no scar and mechanical damage.