


Specification & Instruction of Smart Charger CH-L37V3-V1

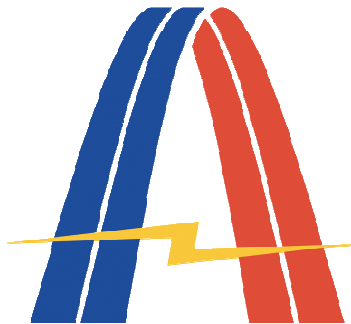


www.BatterySpace.com

AA Portable Power Corp

Specification:

Feature	<ul style="list-style-type: none"> Designed for 37V lithium rechargeable battery with capacity $\geq 3.0\text{Ah}$ Input Power: 100V - 240V AC (USA) Output Power: 42V DC, 3.0A (Tamiya Female connector)
Function	<ul style="list-style-type: none"> CC-CV Charging mode Automatic voltage detection with LED indicator (red/green) during charging process Power On: Battery marked LED Green (without connecting battery) Charging: AC marked LED Red Fully charged: AC marked LED Green
Safety Protection	<ul style="list-style-type: none"> The protection is built in the circuit of the charger to prevent over-voltage <p>Note: Do not make short when the AC is on, it may cause danger or damage of the charger</p>
Dimension	L 6.1" X W 3.3" X H 2.0"
Weight	1.6lb (726g)

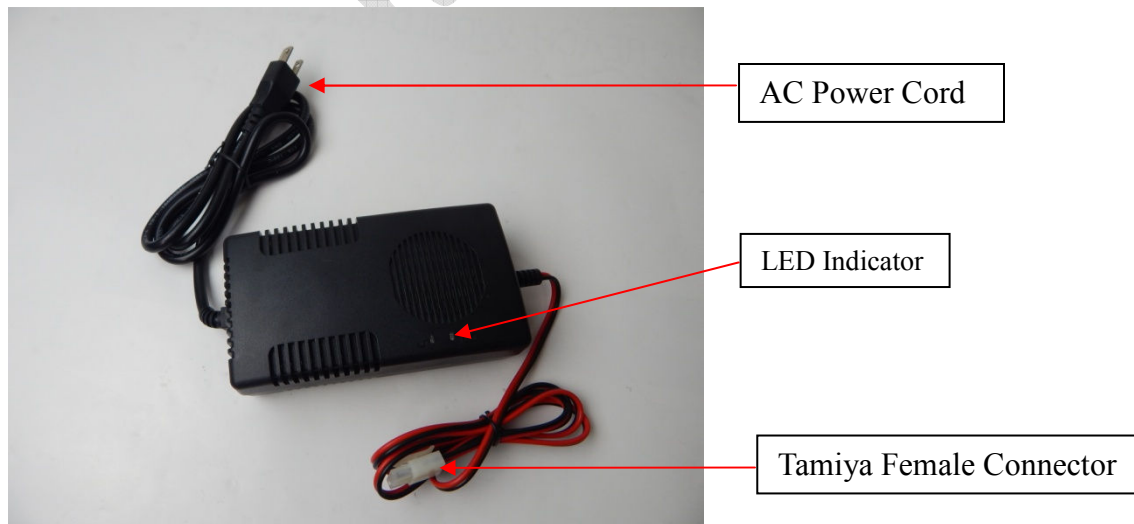

Instruction:

Please carefully read the following instruction before you start to use this charger.

Caution:

- This charger is only for Indoor use
- The charger shall be placed on a fixed horizontal surface when the charger is operated
- Avoid storing or operating the charger in highly humid place or any place with inflammable good
- Do not cover the charger when the charger is operated
The ambient temperature shall not excess 40 °C
- Do not charge the battery on the list below
Voltage < 37V, or Voltage > 37V
Capacity < 3.0Ah
- Battery must be made by high drain current cell
- Completely plug the power cord into AC power resource
Do not expose any metal part of the power cord during operation
Do not use your hand or any of your body to touch the metal part of the power when you connect the power to the charger
- Do not disassembly the charger any time
- AA Portable Power is not responsible for any damage caused by any misuse

Operation Steps:

1. Connect transfer cable (Tamiya male connector) to the output of charger
(Tamiya Female connector)
2. Connect the battery to the transfer cable (alligator clips) with correct polarity
(Red cable connects to positive, Black cable connects to negative)
3. Plug the power cord into the AC power resource
4. When it is in charging process, the AC marked LED indicator turns Red. When the battery is fully charged, the AC marked LED indicator will be Green
Note: When the power is on without connecting the battery, the AC marked LED indicator will be Green, and the battery marked LED will be green
5. The charging time is variable depends on the battery