

AA Portable Power Corp.

Document Number:

Revision: 4

Document Title: Product Specification of Ni-MH - D10000 Cells (Flat Top, 30A rate)

Page 1 of 3

1、SCOPE

This specification governs the performance of the following Nickel-Metal hydride Cylindrical cell and its stack-up battery.

Model: MH- D10000-30A / MH-D10000-30Ax10

Dcrew cut($32.1\pm0.1\times59.0\pm0.5$)mm

2 DATA OF STACK UP BATTERIES

All data involves voltage and weight to stack-up battery are equal to the value of unit cell time the number of unit cell which consisted in the stack-up batteries

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries = $1.2V\times3=3.6V$

3、 RATINGS

Description	Unit	Specification	Conditions
Nominal Voltage	V/Cell	1.2	Unit cell
Nominal Capacity	mAh	10000	Standard Charge/Discharge
Standard Charge	mA	1000(0.1C)	$T_1=0\sim45^{\circ}\text{C}$ (see Note1)
	Hour	14~16	
Quick Charge	mA	3000 (0.3C)	- $\Delta V=0\sim5\text{mV/cell}$ or Timer Cutoff=120% nominal capacity or Temp.Cutoff= 55°C , $T_1=10\sim45^{\circ}\text{C}$
	Hour	4.0approx (see Note 2)	
Trickle Charge	mA	(0.05C)~(0.1C)	$T_1=0\sim45^{\circ}\text{C}$
Max discharge	mA	30000 (3.0C)	$T_1=-30\sim60^{\circ}\text{C}$ Humidity: Max.85%
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	$^{\circ}\text{C}$	-30~65	Discharged state、Humidity、Max.85%
Typical Weight	Gram	165+/- 5	Unit cell

AA Portable Power Corp.

Document Number:

Revision 4

Document Title: Product Specification of Ni-MH-D10000 Cells (Flat Top, 30A rate)

Page 2 of 3

4、 PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : $20 \pm 5^{\circ}\text{C}$

Relative Humidity : $65 \pm 20\%$

Notes: Standard Charge/Discharge Conditions:

Charge: 1000 mA(0.1C)×14 hours

Discharge: 2000 mA(0.2C) to 1.0V/cell

Test	Unit	Specification	Conditions	Remarks
Capacity	mAh	≥ 10000	Standard Charge Discharge	up to 3 cycles are allowed
Open Circuit Voltage(OCV)	V/cell	≥ 1.25	Within 1 hour after standard Charge	
Internal Impedance	m Ω /cell	≤ 7.0	Upon fully charge(1KHz)	
High Rate Discharge(1C)	minute	≥ 54	Standard Charge, 1 hour rest Before discharge by 10000mA (1C)to 1.0V/cell	up to 3 cycles are allowed
Overcharge	/	No leakage nor explosion	1000mA(0.1C)Charge 28 days	
Charge Retention	mAh	$\geq 7000(70\%)$	Standard Charge, Storage: 28 days, Standard Discharge	
IEC Cycle Life	Cycle	≥ 500	IEC285(1993)4.4.1	(see Note 3)
Accelerated Cycle Life	Cycle	≥ 400	Charge:3000mA(0.3C) Discharge: 5000mA(0.5C) To 1.0V/cell, End-of:80% nominal Capacity	Cycling charging cut-off condition: - $\Delta V=0\sim 5\text{mV/cell}$ and Timer cut-off=110% Nominal capacity Input and Temp.cutoff= 55°C
Leakage		No leakage nor deformation	Fully charged at 0.3C for 4.0 hrs Stand for 14 days	
Vibration Resistance		Change of voltage should be under 0.02V/cell,Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs,then leave for 24hrs,check battery before/after vibration, amplitude 1.5mm Vibration 3000 CPM Any direction for 60mins.	
Impact Resistance		Change of voltage sho-uld be under 0.02V/cell Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs Then leave for 24hrs,check bat-before/after dropped, Height 50cm Wooden board(thickness 30mm) Direction not specified,3 times.	

5、CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6、EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

7、WARRANTY

3 months limited warranty against workmanship and material defects.

8、CAUTION

- (1) Reverse charging is not acceptable.
- (2) Charge before use. The cells/batteries are delivered in an uncharged state.
- (3) Do not charge/discharge with more than our specified current.
- (4) Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
- (5) Do not incinerate or mutilate the cell/battery.
- (6) Do not solder directly to the cell/battery.
- (7) the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
- (8) store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.

Notes:


- (1) T_1 : Ambient Temperature.
- (2) Approximate charge time from discharged state, for reference only.
- (3) IEC285(1993)4.4.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	$0.1C \times 16h$	None	$0.25C \times 2h20min$
2-48	$0.25C \times 3h10min$	None	$0.25C \times 2h20min$
49	$0.25C \times 3h10min$	None	0.25C to 1.0V/cell
50	$0.1C \times 16h$	1-4h	0.2C to 1.0V/cell
Cycles 1 to so shall be repeated until the discharge duration on any 50th Cycle becomes less than 3 h.			

AA Portable Power Corp.

MODEL No: MH-D10000-30A
NI-MH-D10000 Cells (Flat Top, 30A rate)

Description:10000mAh D SIZE

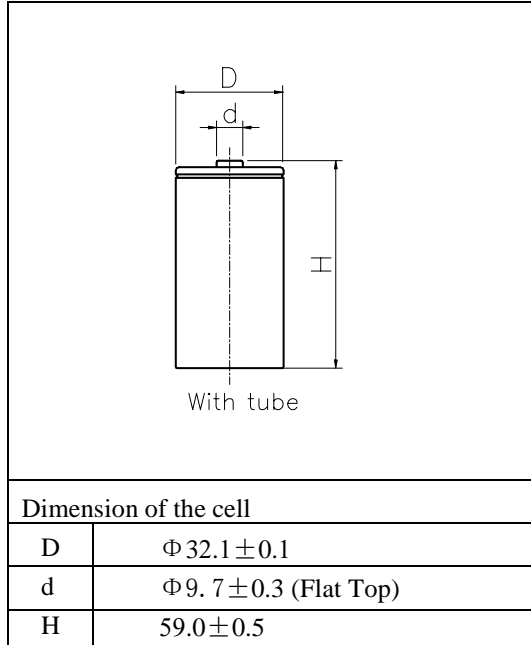

Specification

Nominal Capacity 额定容量		10000 mAh	
Nominal Voltage 额定电压		1.2 V	
Charge current 充电电流	Standard 标准	1900mA	
	Quick 快充	3000 mA	
Charge time 充电时间	Standard 标准	14~16 Hrs	
	Quick 快充	4.0 Hrs	
Ambient Temperature 使用温度	Charge 充电	Standard 标准	0℃~45℃
		Quick 快充	10℃~45℃
	Discharge 放电		-30℃~60℃
	Storage 储存		-30℃~65℃
Internal Impedance(mΩ) (After Charge)充电后内阻		Max≤7.0	
Weight 重量		165+/-5g	

