


# AA Portable Power Corp

## ULB482340 DATASHEET

Technical Specifications and Performance	
System	Lithium battery
Cathode	Manganese dioxide
Anode	Metallic lithium
Nominal Voltage	3.0 V
Close loop voltage (1.2K resistor)	$\geq 2.88$ V
Inner resistance	$\leq 50$ $\Omega$
Nominal Capacity (C/40@23°C)	25 mAh (Discharge to 2.0V )
Max. cont. Discharge(23°C)	C/2
Operating Temperature	-20°C~60°C
Storage Temperature	-20°C~60°C
Weight	Approx. 0.75 g
Max Thickness	0.45 mm
Anode tap/ Cathode tap	Copper / Alumium
Self Discharge Rate	Under 10 % for 3 years @ 30 °C
Jacket	Flexible Aluminum Foil Packaging
Approved product by UL & Rohs	

### Typical Discharge Characteristics

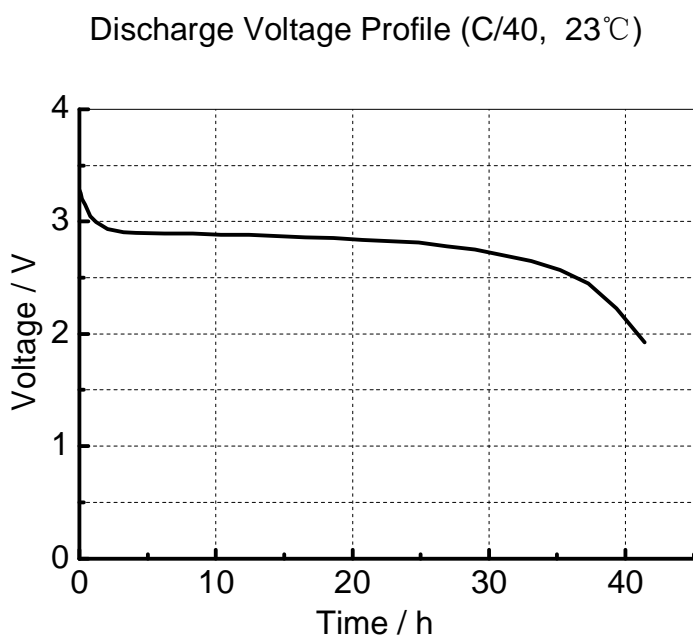

### Dimensions

