


AA Portable Power Corp.

MODEL No: MH-C4500


Description: 5000mAh C SIZE Ni-MH

Specification


Nominal Capacity 额定容量	5000 mAh		
Nominal Voltage 额定电压	1.2 V		
Charge current 充电电流	Standard 标准	500mA	
	Quick 快充	1350 mA	
	Fast 急充	2500mA	
Charge time 充电时间	Standard 标准	14~16 Hrs	
	Quick 快充	4.0Hrs	
	Fast 急充	2.2Hrs	
Ambient Temperature 使用温度	Charge 充电	Standard 标准	0°C~45°C
		Quick 快充	10°C~45°C
		Fast 急充	10°C~45°C
	Discharge 放电		-30°C~60°C
Storage 储存		-30°C~65°C	
Internal Impedance(AC) (After Charge) 充电后内阻		Max ≤ 12	
Weight 重量		88.5g	

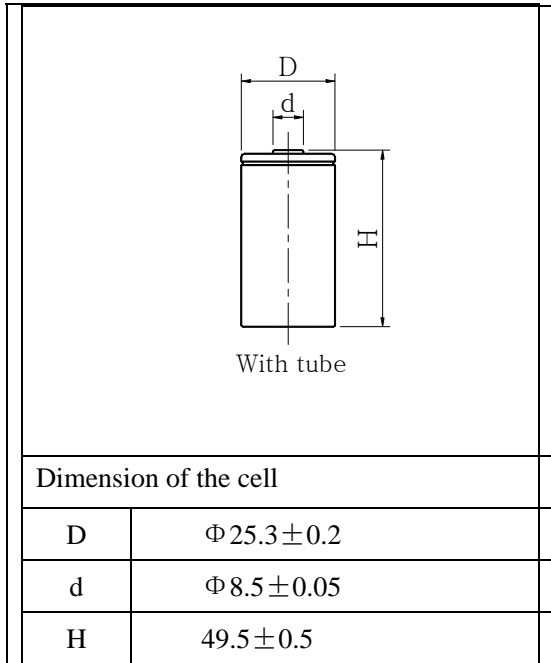


Charge(充电)

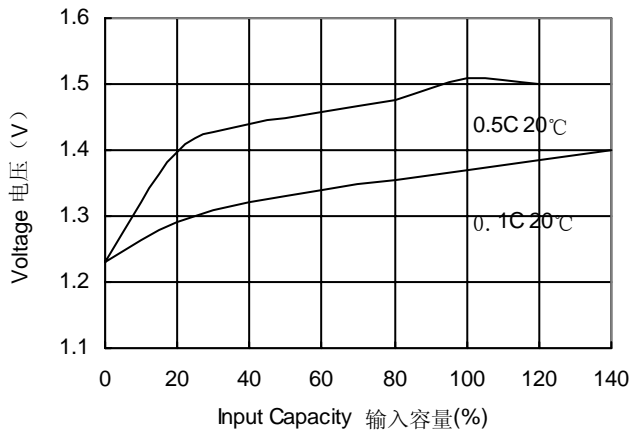


Discharge at high rate(高倍率放电)

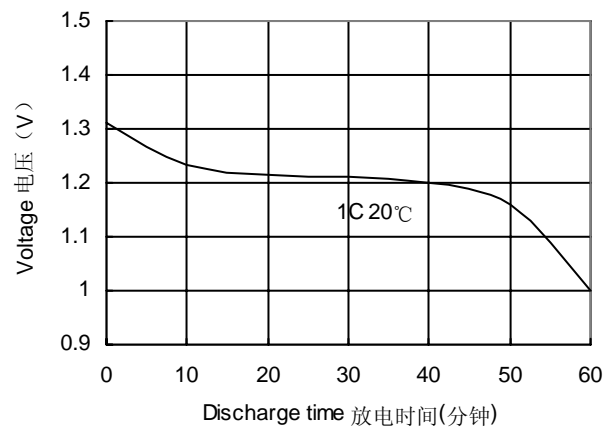

Discharge at low rate(低倍率放电)

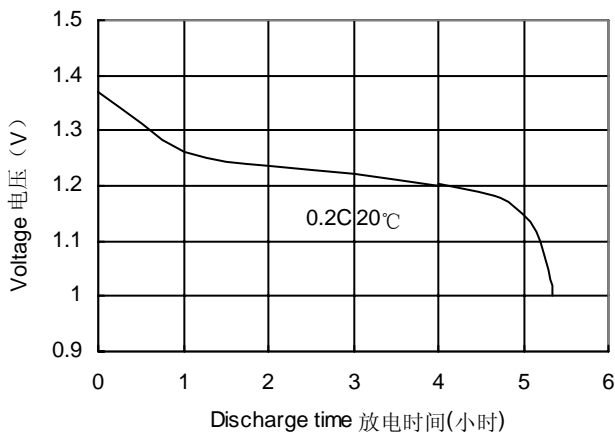

Charge Retention(荷电保持能力)

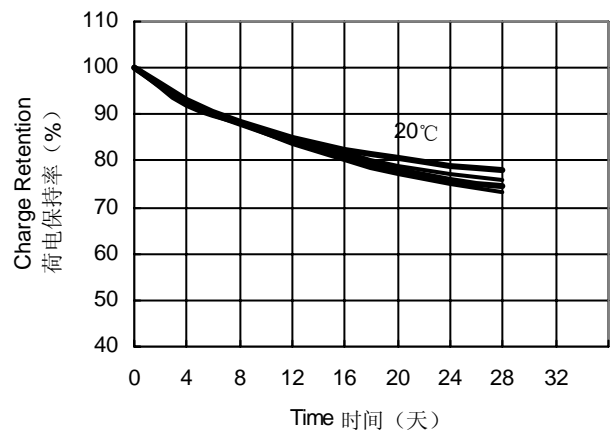

AAPPC

Document Number:

Revision: 3

Document Title: Product Specification of Ni-MH C5000 Cells

Page 1 of 3

1、SCOPE

This specification governs the performance of the following Nickel-Metal hydride Cylindrical cell and its stack-up battery。

Model: MH- C5000

Cell Size: C Flat Top($\phi 25.4^{\pm 0.2} \times 49.0^{\pm 0.5}$)

C Button top($\phi 25.4^{\pm 0.2} \times 49.5^{\pm 0.5}$)

2、DATA OF STACK UP BATTERIES

All data involves voltage and weight to stack-up battery are equal to the value of unit cell time the number of unit cell which consisted in the stack-up batteries

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries =1.2V \times 3=3.6V

3、RATINGS

Description	Unit	Specification	Conditions
Nominal Voltage	V/Cell	1.2	Unit cell
Nominal Capacity	mAh	5000	Standard Charge/Discharge
Standard Charge	mA	500(0.1C)	T ₁ =0~45°C (see Note1)
	Hour	14~16	
Fast Charge	mA	2500 (0.5C)	- $\Delta V=0\sim 5\text{mV}/\text{cell}$ or Timer Cutoff=110% nominal capacity or Temp.Cutoff=55°C, T ₁ =10~45°C
	Hour	2.2approx (see Note 2)	
Trickle Charge	mA	(0.05C)~(0.1C)	T ₁ =0~45°C
Standard discharge	mA	1000 (0.2C)	T ₁ = -20~50°C Humidity: Max.85
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	°C	-20~65	Discharged state、 Humidity、 Max.85%
Typical Weight	Gram	88.5	Unit cell

AAPPC

Document Number:

Revision 3

Document Title: Product Specification of Ni-MH C5000 Cells

Page 2 of 3

4、 PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : $20 \pm 5^{\circ}\text{C}$

Relative Humidity : $65 \pm 20\%$

Notes: Standard Charge/Discharge Conditions:

Charge: $450\text{mA}(0.1\text{C}) \times 14$ hours

Discharge: $900\text{ mA}(0.2\text{C})$ to $1.0\text{V}/\text{cell}$

Test	Unit	Specification	Conditions	Remarks
Capacity	mAh	≥ 5000	Standard Charge Discharge	up to 3 cycles are allowed
Open Circuit Voltage	V/cell	≥ 1.25	Within 1 hour after standard Charge	
Internal Impedance	$\text{m}\Omega/\text{cell}$	≤ 12.0	Upon fully charge(1KHz)	
High Rate Discharge(1C)	minute	≥ 54	Standard Charge, 1 hour rest Before discharge by $4500\text{mA}(1\text{C})$ to $1.0\text{V}/\text{cell}$	up to 3 cycles are allowed
Overcharge	/	No leakage nor explosion	$450\text{mA}(0.1\text{C})$ Charge 28 days	
Charge Retention	mAh	$\geq 3150(70\%)$	Standard Charge, Storage: 28 days, Standard Discharge	
IEC Cycle Life	Cycle	≥ 500	IEC285(1993)4.4.1	(see Note 3)
Accelerated Cycle Life	Cycle	≥ 400	Charge: $1350\text{mA}(0.3\text{C})$ Discharge: $2250\text{mA}(0.5\text{C})$ To $1.0\text{V}/\text{cell}$, End-of: 80% nominal Capacity	Cycling charging cut-off condition: - $\Delta V = 0 \sim 5\text{mV}/\text{cell}$ and Timer cut-off = 110% Nominal capacity Input and Temp. cutoff = 55°C
Leakage		No leakage nor deformation	Fully charged at : $2250\text{mA}(0.5\text{C})$ for 2.4hrs Stand for 14 days	
Vibration Resistance		Change of voltage should be under $0.02\text{V}/\text{cell}$, Change of impedance should be under $5\text{ milli-ohm}/\text{cell}$	Charge the battery 0.1C 14hrs, then leave for 24hrs, check Battery before/after vibration, Amplitude 1.5mm Vibration 3000 CPM Any direction for 60mins.	
Impact Resistance		Change of voltage should be under $0.02\text{V}/\text{cell}$ Change of impedance should be under $5\text{ milli-ohm}/\text{cell}$	Charge the battery 0.1C 14hrs Then leave for 24hrs, check bat-before/after dropped, Height 50cm Wooden board(thickness 30mm) Direction not specified, 3 times.	

AAPPC

Document Number:
Document Title: Product Specification of Ni-MH C5000 Cells

Revision:3
Page 3 of 3

5、 CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

7、 WARRANTY

One year limited warranty against workmanship and material defects.

8、 CAUTION

- (1)Reverse charging is not acceptable.
 - (2)Charge before use. The cells/batteries are delivered in an uncharged state.
 - (3)Do not charge/discharge with more than our specified current.
 - (4)Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
 - (5)Do not incinerate or mutilate the cell/battery.
 - (6)Do not solder directly to the cell/battery.
 - (7)the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
 - (8)store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.
-

Notes:

- (1) T_1 : Ambient Temperature.
- (2) Approximate charge time from discharged state, for reference only.
- (3) IEC285(1993)4.4.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	$0.1C \times 16h$	None	$0.25C \times 2h20min$
2-48	$0.25C \times 3h10min$	None	$0.25C \times 2h20min$
49	$0.25C \times 3h10min$	None	$0.25C$ to 1.0V/cell
50	$0.1C \times 16h$	1-4h	$0.2C$ to 1.0V/cell
Cycles 1 to so shall be repeated until the discharge duration on any 50th Cycle becomes less than 3 h.			
