


☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hrs) : 26.0 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 125 mm (4.92 inches)
 - CONTAINER HEIGHT : 125 mm (4.92 inches)
 - LENGTH : 166 mm (6.54 inches)
 - WIDTH : 175 mm (6.89 inches)
- WEIGHT : APPROX 8.80 Kg (19.40 lbs)
- MAX DISCHARGE CURRENT : 260 A (5 sec)
- STANDARD TERMINALS : FP-01
- CONTAINER MATERIA L : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 20 hr @ 1.3 A : 25 Ah
 - 5 hr @ 4.16 A : 20.8 Ah
 - 1 hr @ 15.6 A : 15.6 Ah
 - 1 C @ 26 A : 13 Ah
- INTERNAL RESISTANCE() : 10 mΩ @ 77 F Ω
- CHARGING VOLTAGE (25 C , 77 F)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELE
 - : (-5 mV / C / CELL) °
- MAX CHARGING CURRENT : 7.8 A


Discharge Characteristics 25 C 77 F⁰⁰

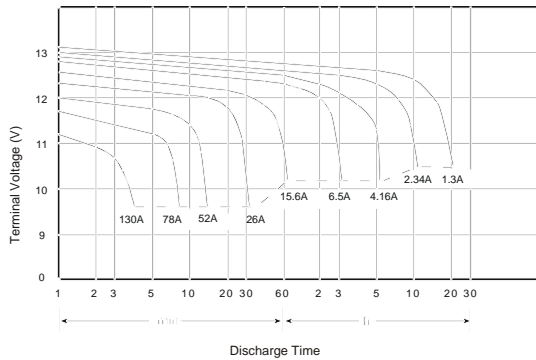

Discharge Current vs Time

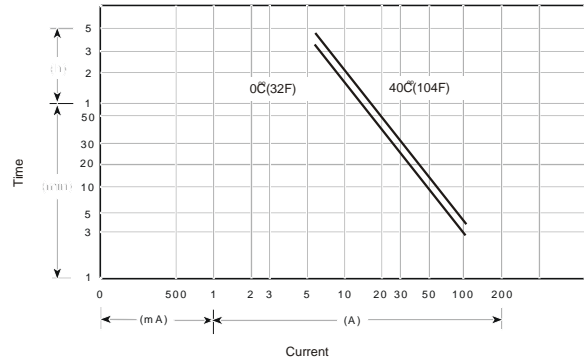

☆ Dimensions

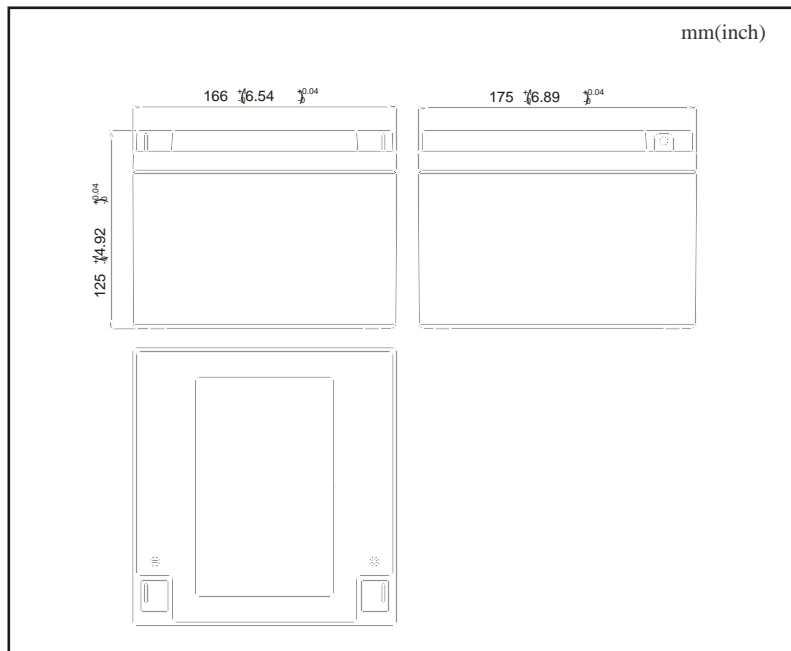

☆ Terminal

