

Product Specification

Product Model: Nickel-Cadmium Battery

Product Type: 1/2D2400

Draw up: Technical Department

Date: 2010-11-25

1 、 SCOPE

This specification governs the performance of the following AA Portable Power Nickel-Cadmium cylindrical cell and its stack-up battery.

Model: 1/2D2400

Cell Size: 1/2Dcrew cut(32.1±0.1×35.0±0.5)mm
1/2Dcusp(32.1±0.1×36.5±0.5)mm

2 、 DATA OF STACK UP BATTERIES

All data involve voltage and weight of stack-up batteries are equal to the value of unit cell multiplied by the number of unit cell which consisted in the stack-up batteries.

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries =1.2V×3=3.6V

3、 RATINGS

Description	Unit	Specification	Condition
Nominal Voltage	V/cell	1.2	Unit cell or stack-up batteries
Nominal Capacity	mAh	2400	Standard Charge/Discharge
Standard Charge	mA	240 (0.1C)	T ₁ =20±5°C (See Note 1)
	hour	16	
Fast Charge	mA	1200 (0.5C)	- ΔV=0~15mV/cell , Timer Cutoff=120%nominal capacity , Temp.Cutoff=55°C , dT/dt=0.8°C/min, T ₁ =20±5°C
	hour	2.4 approx (See Note 2)	
Trickle Charge	mA	(0.03C)~(0.05C)	T ₁ =20±5°C
Standard discharge	mA	480 (0.2C)	T ₁ = 20±5°C Humidity: Max85%
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	°C	-20~30(Within 1 year)*	Discharged state Humidity: Max85%
		-20~40(Within 6 months)	
		-20~50(Within 1 month)	
		-20~60(Within 1 week)	
Typical Weight	Gram	71	unit cell

*To keep the best performance for those not used for a long time,we recommend to charge and discharge the cells/batteries at least once in every 6 months.

4、 PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : 20±5℃

Relative Humidity : 65±20%

Notes: Standard Charge/Discharge conditions:

Charge: 240 mA(0.1C)× 16 hours

Discharge: 480 mA(0.2C) to 1.0V/cell

Test	Unit	Specification	Condition	Remarks
Capacity	mAh	≥ 2500	Standard Charge / discharge	up to 3 cycles are allowed
Open Circuit Voltage(OCV)	V	≥ 1.25	Within 1 hour after standard charge	
Internal Impedance	mΩ	≤ 18	Upon fully charged(1KHz)	
High Rate Discharge(1C)	min	≥ 51	Standard Charge, 1 hour rest before discharge by 1C to 1.0V/cell	up to 3 cycles are allowed
Charge Retention	mAh	≥ 1625 (65%)	Standard Charge,Storage: 28 days,Standard Discharge	T ₁ =20±5℃
IEC Cycle Life	Cycle	≥500	IEC61951-1(2003)7.4.1.1	see Note 3
Leakage		No leakage nor deformation	Fully charged at 250 mA for 28 days	
Vibration Resistance		Change of voltage should be less than 0.02V/cell,change of impedance should be less than 5milliohm/cell	Charge the battery at 0.1C for 14hrs,then leave for 24hrs,check battery before/after vibration,amplitude 1.5mm,vibration 3000 CPM,any direction for 60mins.	
Impact Resistance		Change of voltage should be less than 0.02V/cell,change of impedance should be less than 5milliohm/cell	Charge the battery at 0.1C for 14hrs,then leave for 24hrs,check battery before/after dropped,height 50 cm wooden board(thickness 30mm)direction not specified,3 times.	

5、 CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage or deformation.

7、 WARRANTY

One year limited warranty against workmanship and material defects.

8、 CAUTION

[1]Reverse charging is not acceptable.

[2]Charge before use. The cells/batteries are delivered in an uncharged state.

[3]Do not charge/discharge with more than our specified current.

[4]Do not short circuit the cell/battery Permanent damage to the cells/batteries may result.

[5]Do not incinerate or mutilate the cells/batteries.

[6]Do not solder directly to the cells/batteries.

[7]The expected life may be reduced if the cells/batteries are subjected to adverse conditions as:
extreme temperature, deep cycling, excessive overcharge/ over-discharge.

[8]Store the cells/batteries in a cool dry place. Always discharge batteries before packing.

Notes:

(1) T_1 : Ambient Temperature.


(2) Approximate charge time from discharged state, for reference only.

(3) IEC61951-1(2003)7.4.1.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	0.1C×16h	None	0.25C×2h20min
2-48	0.25C×3h10min	None	0.25C×2h20min
49	0.25C×3h10min	None	0.25C to 1.0V/cell
50	0.1C×16h	1-4h	0.2C to 1.0V/cell
Cycle 1 to 50 shall be repeated until the discharge duration on any 50th cycle becomes less than 3 h.			

MODEL No: J-1/2D2400

Description: 2400 mAh SIZE NI-Cd D

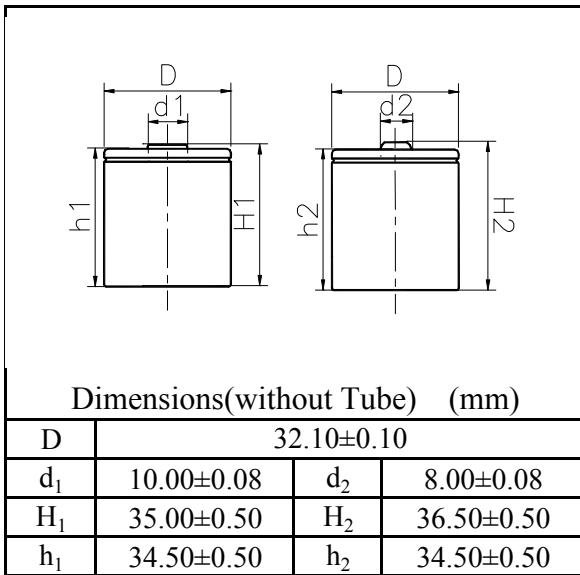

Specification

Nominal Capacity		2400 mAh	
Nominal Voltage		1.2 V	
Charge current	Standard	240 mA	
	Fast	1200 mA	
Charge time	Standard	16 Hrs	
	Fast	2.4 Hrs	
Ambient Temperature	Charge	Standard	0°C~45°C
		Fast	10°C~45°C
	Discharge		-30°C~60°C
Storage		-20°C~60°C	
Internal Impedance(mΩ) (After Charge)		≤ 18	
Weight		71 g	

