

TY121100 12V, 110Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hrs) : 110.0 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 235 mm (9.25 inches)
 - CONTAINER HEIGHT : 210 mm (8.27 inches)
 - LENGTH : 407 mm (16.02 inches)
 - WIDTH : 173 mm (6.81 inches)
- WEIGHT : APPROX 36.70 Kg (80.91 lbs)
- MAX DISCHARGE CURRENT : 880 A (5 sec)
- STANDARD TERMINALS : FP-05
- CONTAINER MATE RIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 C / 77 F
 - 20 hr @ 5.5 A : 110 Ah
 - 5 hr @ 17.6 A : 88 Ah
 - 1 hr @ 66 A : 66 Ah
 - 1 C @ 110 A : 55 Ah
- INTERNAL RESISTANCE() : 6 mΩ @ 25°C, 77°F Ω
- CHARGING VOLTAGE (25C , 77 F)
 - STANDBY USE : 2.2750.025 V/CELL
 - : (-3.3mV / C / CELL)
 - CYCLE USE : 2.450.05 V/CELL
 - : (-5 mV / C / CELL)
- MAX CHARGING CURRENT : 33 A


Discharge Characteristics 25 C (77 F)

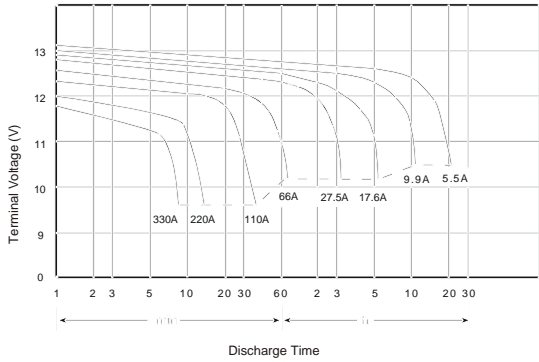

Discharge Current vs Time

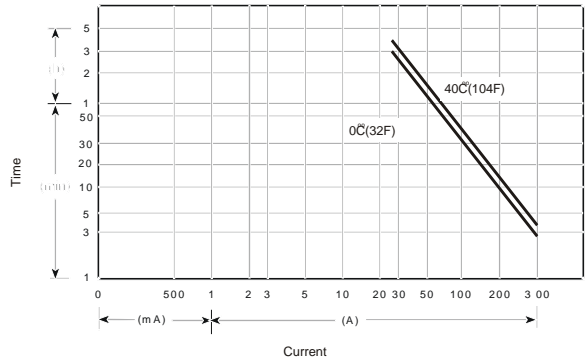

☆ Dimensions

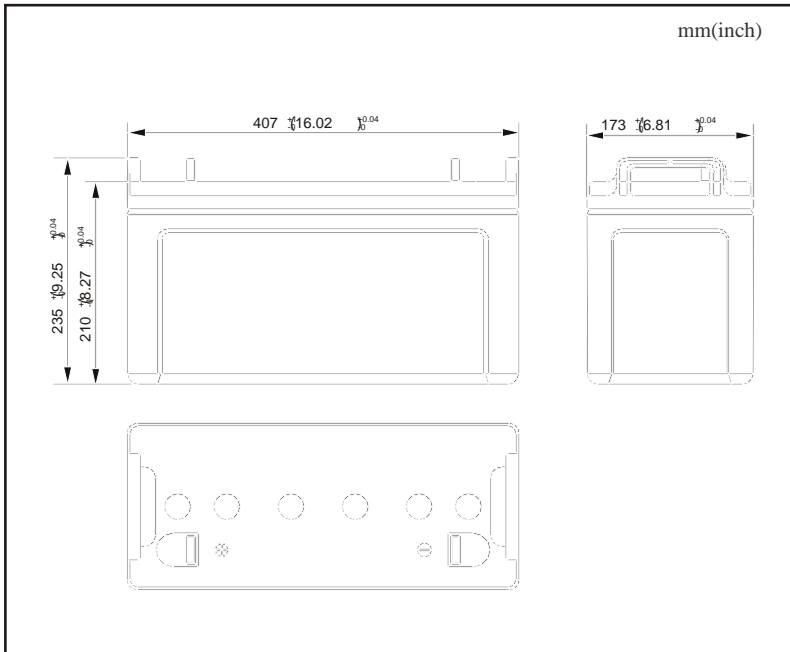

☆ Terminal

