



☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 70.0 Ah	20 hr @ 3.5 A : 70 Ah
● DIMENSIONS	10 hr @ 6.3 A : 63 Ah
TOTAL HEIGHT : 174 mm (6.85 inches)	5 hr @ 11.2 A : 56 Ah
CONTAINER HEIGHT : 174 mm (6.85 inches)	1 hr @ 42A : 42 Ah
LENGTH : 350 mm (13.78 inches)	1 C @ 70 A : 35 Ah
WIDTH : 166 mm (6.54 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 7 mΩ
WEIGHT : APPROX23.0 kg (50.7 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 520 A (5 sec)	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 1300 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FP-28/RT-19	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 21 A


Discharge Characteristics 25 °C (77 °F)

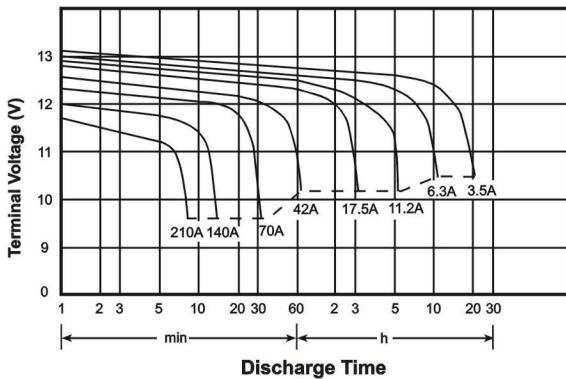

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

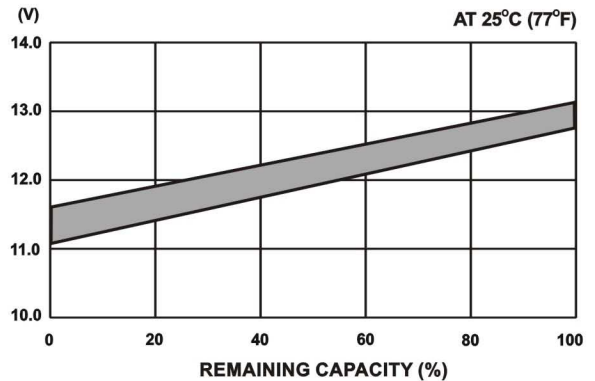

☆ **Dimensions**

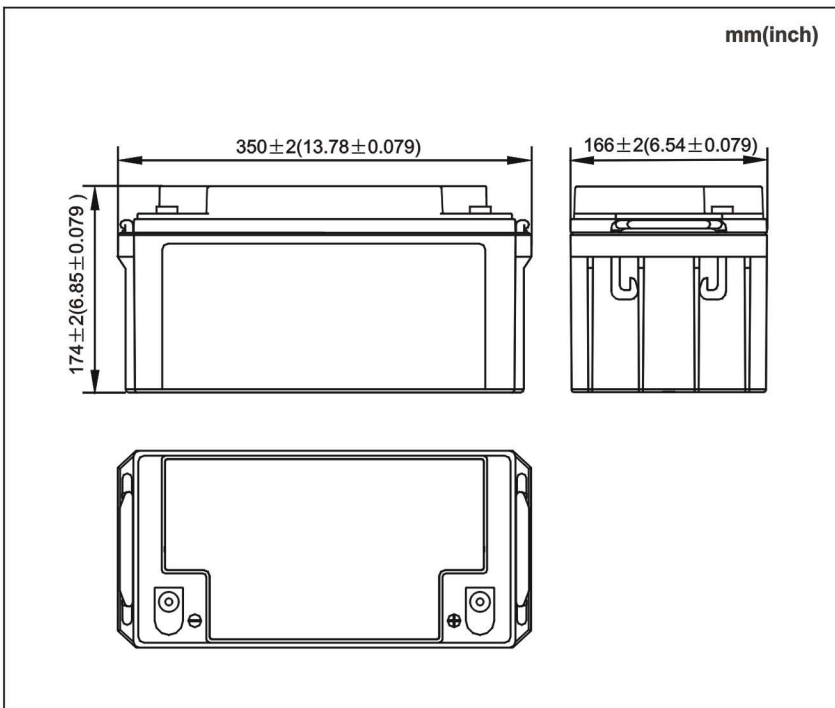

☆ **Terminal**

