Polymer Lithium-ion Battery

Product Specification

Model: PL-402248-2C



AA Portable Power Corp (http://www.batteryspace.com) Address: 860 S, 19th St, Unit A, Richmond, CA, 94804 Tel: 510-525-2328 Fax: 510-439-2808

> Email: Sales@batteryspace.com Prepared & Approved by Max (01/17/10)

Doc. No.	Q/WMDCJ03011-2011
Edition No.	1.0
Sheet	2/7

1, Scope

This product specification describes AA Portable Power Corp polymer lithium-ion battery. Please using the test methods that recommend in this specification. If you have any opinions or advices about the test items and methods, please contact us. Please read the cautions recommended in the specifications first, take the credibility measure of the cell's using.

If the cells should be using at the environment that not preferred in this document, please connect with our first and get our authorization. For the reason of stable performance and better safety, battery pack with more than 2 cells connected in serial way should be charged with a balance charger.

It is claimed that we should have no any responsibility with the contingency and loss due to the cells' wrong usage (not preferred in the product specification).

2, Product Type, Model and Dimension

2.1 Type: Polymer lithium-ion battery

2.2 Model: 402248(Cell adding Ni Tabs)

2.3 Cell Dimension(Max, Thickness × Width × Length, mm³): $4.1 \times 22.5 \times 49.0$

Pack Dimension(Max, Thickness \times Width \times Length, mm³): \angle

3. Specification

Sy opecification				
Item		Specifications	Remark	
Nominal Cap	pacity	400mAh ± 5%	0.2C ₅ A discharge, 25	
Nominal Vo	ltage	3.70V	Average Voltage at 0.2C ₅ A discharge	
Standard Charg	ge Current	$0.2~\mathrm{C_5A}$	Working temperature: 0 ~ 45	
Max Charge (Current	1C ₅ A	Working temperature: 0~45	
Charge cut-off	Voltage	4.2V	CC/CV	
Discharge Current		Continuously:0.2C ₅ A; Max: 2C ₅ A	Working temperature: -20~60	
Discharge cut-off Voltage		2.75V		
Cell Voltage		3.76-3.90V	When leave factory	
Impedan	ce	<u>100</u> m	AC 1KHz after 50% charge,25	
Weight		Approx:9.5g		
Storage	1month	-10 ~ 45		
temperature	3month	0~30	Best 20 ± 5 for long-time	
	6month	20 ± 5	storage	
Storage humidity		65 ± 20% RH		

4. General Performance

Definition of Standard charging method: At 20 ± 5 , charging the cell initially with constant current $0.2C_5A$ till voltage 4.2V, then with constant voltage 4.2 till current declines to $0.05C_5A$.

	Item	Test Methods Perform	
4.1	0.2C Capacity	After standard charging, laying the battery 0.5h, then discharging at $0.2C_5A$ to voltage 2.75V, recording the discharging time.	300min
4.2	1C Capacity	After standard charging, laying the battery 0.5h, then discharging at $1C_5A$ to voltage 2.75V, recording the discharging time.	54min
4.3	Cycle Life	Constant current $1C_5A$ charge to 4.2V, then constant voltage charge to current declines to $0.05C_5A$, stay 5min , constant current $1C_5A$ discharge to 2.75V , stay 5min. Repeat above steps till continuously discharging time less than 36min.	

Doc. No.	Q/WMDCJ03011-2011
Edition No.	1.0
Sheet	3/7

	Capability of	20 ± 5 , After standard charging, laying the battery 28days,	
4.4	keeping	discharging at 0.2C ₅ A to voltage2.75V, recording the 240m	iin
	electricity	discharging time.	

5. Environment Performance

	Item	Test Methods	Performance
5.1	High temperature After standard charging, laying the battery 4h at 60, then discharging at 0.2C ₅ A to voltage 2.75V, recording the discharging time.		270min
5.2	Low temperature	After standard charging, laying the battery 4h at -20 , then discharging at $0.2C_5A$ to voltage 2.75V, recording the discharging time.	210min
5.3	Constant humidity and temperature	After standard charging, laying the battery 48h at 40 ± 2 , RH 93 \pm 2%. Recording $0.2C_5A$ discharging time	No distortion No electrolytes leakage 270 min

6. Mechanical Performance

	Item	Test Methods Performance	
6.1	Vibration	After standard charging, put battery on the vibration table. 30 min experiment from X,Y,Z axis. Scan rate: 1 oct/min; Frequency 10-30Hz, Swing 0.38mm; Frequency 30-55Hz, Swing 0.19mm.	No influence to batteries' electrical performance and appearance.
6.2	Collision	After vibration test, batteries were laying on the vibration table about X, Y, Z axis. Max frequency acceleration: 100m/s^2 ; collision times per minutes: $40 \sim 80$; frequency keeping time 16ms ; all collision times 1000 ± 10 .	No influence to batteries' electrical performance and appearance.
6.3	Drop	Random drop the battery from 1.0m height onto woodboard one times.	No explosion or fire

7. Safety Test

Test conditions : The following tests must be measured at flowing air and safety protection conditions. All batteries must standard charge and lay 24h.

Item Test Methods Performa		Performance	
7.1	Over charge	At 20 ± 5 , charging batteries with constant current $3C_5A$ to voltage5V, then with constant voltage5V till current decline to 0. Stop test till batteries' temperature 10 lower than max temperature.	No explosion or fire
7.2	Over discharge	At 20 ± 5 , discharge battery with $0.2C_5A$ continuously 12.5h.	No explosion or fire
7.3	Short-circuit	At 20 ± 5 , connect batteries' anode and cathode by wire which impedance less than 50m, keep 6h.	No explosion or fire
7.4	Extrusion	At 20 ± 5 , put the battery in two parallel steal broad, add pressure 13kN.	No explosion or fire

Doc. No.	Q/WMDCJ03011-2011
Edition No.	1.0
Sheet	4/7

		Put the battery in the oven. The temperature of the oven	
7.5	Thermal shock	is to be raised at 5 ± 1 per minute to a temperature of	No explosion or fire
		130 ± 2 and remains 60 minutes.	

8. Cautions

8.1 Cautions of batteries' operation

The batteries must be careful of proceed the operation for it's soft package.

8.1.1 Aluminum packing materials

The aluminum packing material was easily damaged by the sharp edge part, such as nickel-tabs.

forbid to use the sharp part touching the battery;

should cleaning working condition, avoiding the sharp edge part existence;

forbid to pierce the battery with nail and other sharp items;

the battery was forbidden with metal, such as necklace, hairpin etc in transportation and storage.

8.1.2 Sealed edge

Sealing edge is very easily damaged and don't bend it.

The Al interlayer of package has good electric performance. It's forbidden to connect with exterior component for preventing short-circuits.

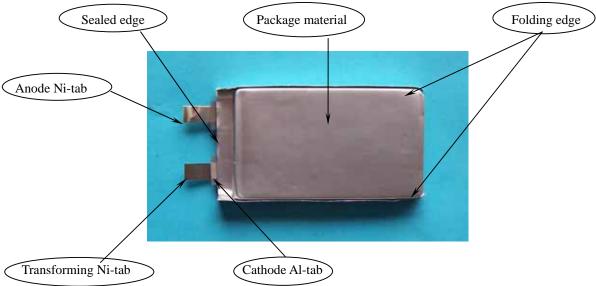


Fig.1. Exterior schematic of polymer lithium-ion cells

8.1.3 Folding edge

The folding edge is formed in batteries' processes and passed all hermetic tests, don't open or deform it. The Al interlayer of package has good electric performance. It's forbidden to connect with exterior component for preventing short-circuits.



Fig.2. Single folding edge schematic of PL cells

Fig.3. Reverse folding edge schematic of PL cells

Doc. No.	Q/WMDCJ03011-2011
Edition No.	1.0
Sheet	5/7

8.1.4 Tabs

The batteries' tabs are not so stubborn especially for aluminum tabs. Don't bend tabs.

The tab-tapes are used to isolate The anode /cathode tabs from Aluminum packing materials to prevent short-circuit, so prohibit manicuring of the tab-tapes.

8.1.5 Mechanical shock

Don't fall, hit, bent the batteries' body.

Don't knock on by sinker or trample the batteries.

Don't sling the batteries.

8.1.6 Short-circuit

Short-circuit is strictly prohibited. It should damage batteries badly.

Don't connect the anode and cathode of the batteries to avoid short-circuit.

Prohibit short-circuit of the anode (or cathode) and aluminium layer of Aluminum packing materials.

8.2 Standard Test Environment for polymer lithium-ion batteries

Environment temperature: 20 ± 5 Humidity: 45-85%

8.3 Cautions of charge & discharge

8.3.1 charge

Charging current should be lower than values that recommend below. Higher current and voltage charging may cause damage to cell electrical, mechanical, safety performance and could lead heat generation or leakage.

Batteries charger should charging with constant current and constant voltage mode;

Charging current should be lower than (or equal to)1C₅A;

Temperature $0 \sim 45$ is preferred when charging;

Charging voltage must be lower than 4.25V.

8.3.2 discharge

Discharging current must be lower than (or equal to)2C₅A;

Temperature $-20 \sim 60$ is preferred when discharging;

Discharging voltage must not be lower than 2.75V.

8.3.3 over-discharge

It should be noted that the cell would be at an over-discharge state by its self-discharge. In order to prevent over-discharge, the cell shall be charged periodically to keeping voltage between 3.7-3.9V. Over-discharge may cause loss of cell performance. It should be noted that the cell would not discharge till voltage lower than 2.75V.

8.4 Storage of polymer lithium-ion batteries

The environment of long-time storage:

Temperature: 20 ± 5 ; Humidity: 45-85%;

Batteries were 40 ~ 60% charged.

In case of over-discharge, batteries should be charged for one time every 3 months while storing. Batteries should be discharged and charged after being stored more than a year in order to activate it and restore energy. Please charge the battery with constant current $0.5C_5A$ for 1 hour so that it has some storage of charge for properly using.

Charge and discharge afresh to active and renew battery energy after storage above 1 year.

8.5. Transportation of polymer lithium-ion batteries

The batteries should transportation with $10 \sim 50\%$ charged states.

8.6.Others

Please note cautions below to prevent cells' leakage, heat generation and explosion.

Prohibition of disassembly cells;

Prohibition of cells immersion into liquid such as water or seawater;

Prohibition of dumping cells into fire;

Prohibition of using damaged cells. The cells with a smell of electrolyte or leakage must be placed away from fire to avoid firing.

Doc. No.	Q/WMDCJ03011-2011
Edition No.	1.0
Sheet	6/7

In case of electrolyte leakage contact with skin, eye, physicians shall flush the electrolyte immediately with fresh water and medical advise is to be sought.

9. Notice of Designing Battery Pack

9.1 Pack design

Battery pack should have sufficient strength and battery should be protected from mechanical shock. No sharp edge components should be inside the pack contain the battery.

9.2 PCM design

The overcharge threshold voltage should not be exceed 4.25V.

The over-discharge threshold voltage should not be lower than 2.3V.

The PCM should have short protection function built inside.

9.3 Tab connection

Ultrasonic welding or spot welding is recommended to connect battery with PCM or other parts.

If apply manual solder method to connect tab with PCM, the notice below is very important to ensure battery performance.

The electric iron should be temperature controlled and ESD safe;

Soldering temperature should not exceed 350 ;

Soldering time should not be longer than 3s, keep battery tab cold down before next soldering;

Soldering times should not exceed 5 times;

Directly heat cell body is strictly prohibited, battery may be damaged by heat above approx. 100 .

9.4 Cell fixing

The battery should be fixed to the battery pack by its large surface area. No cell movement in the battery pack should be allowed.

9.5 Cells replacement

The cell replacement should be done by professional people.

Prohibit short-circuit between cells' Al package and exterior component.






Fig.4. Schematic of wrong assembly

Doc. No.	Q/WMDCJ03011-2011			
Edition No.	1.0			
Sheet	7/7			


10. Schematic of Battery with tolerance +/- 0.5 mm:




Cell or adding Ni tabs



Cell adding PCM, wire



Cell adding wire



Cell adding wire

Parameter with tolerance +/- 0.5 mm:

Sign	Item	+/-0.5mm	Remark	Sign	Item	+/-0.5mm	Remark
Α	Length	49.0		L	Space between Tabs	10.2	
В	Width	22.5		Е	PP membrane Length	2.5	
Н	Thickness	4.1		b	Tab Width	3	
	Wire Standard	/			Plug Standard	/	