

AA Portable Power Corp.

Document Number:

Revision: 3

Document Title: Product Specification of Ni-MH – AAA800 Cells

Page 1 of 3

1、SCOPE

This specification governs the performance of the following Nickel-Metal hydride Cylindrical cell and its stack-up battery。

Model: MH- AAA800

Cell Size: AAA Flat Top ($\phi 10.1^{+0.2} \times 43.6^{+0.5}$)

2、DATA OF STACK UP BATTERIES

All data involves voltage and weight to stack-up battery are equal to the value of unit cell time the number of unit cell which consisted in the stack-up batteries

Example : Stack-up batteries consisting three unit cells

Nominal voltage of unit cell=1.2V

Nominal voltage of stack-up batteries =1.2V×3=3.6V

3、RATINGS

Description	Unit	Specification	Conditions
Nominal Voltage	V/Cell	1.2	Unit cell
Nominal Capacity	mAh	800	Standard Charge/Discharge
Standard Charge	mA	80 (0.1C)	T ₁ =0~45℃(see Note1)
	Hour	14~16	
Fast Charge	mA	350(0.5C)	- Δ V=0~5mV/cell or Timer Cutoff=120% nominal capacity or Temp.Cutoff=55℃, T ₁ =10~45℃
	hour	2.4approx (see Note 2)	
Trickle Charge	mA	(0.05C)~(0.1C)	T ₁ =0~45℃
Standard discharge	mA	140 (0.2C)	T ₁ = -30~60℃ Humidity: Max.85%
Discharge Cut-off Voltage	V/cell	1.0	
Storage Temperature	℃	-30~65	Discharged state、 Humidity、 Max.85%
Typical Weight (unit cell)	Gram	14	

AA Portable Power Corp.

Document Number:

Revision 3

Document Title: Product Specification of Ni-MH-AAA800 Cells

Page 2 of 3

4、 PERFORMANCE

Unless otherwise stated, tests should be done within one month of delivery under the following conditions:

Ambient Temperature : $20 \pm 5^{\circ}\text{C}$

Relative Humidity : $65 \pm 20\%$

Notes: Standard Charge/Discharge Conditions:

Charge: 80 mA (0.1C) \times 14 hours

Discharge: 160 mA (0.2C) to 1.0V/cell

Test	Unit	Specification	Conditions	Remarks
Capacity	mAh	≥ 800	Standard Charge Discharge	up to 3 cycles are allowed
Open Circuit Voltage(OCV)	V/cell	≥ 1.25	Within 1 hour after standard Charge	
Internal Impedance	m Ω /cell	32	Upon fully charge(1KHz)	
High Rate Discharge(1C)	minute	≥ 54	Standard Charge, 1 hour rest Before discharge by 700mA (1C)to 1.0V/cell	up to 3 cycles are allowed
Overcharge	/	No leakage nor explosion	70mA(0.1C)Charge 28 days	
Charge Retention	mAh	$\geq 490(70\%)$	Standard Charge, Storage: 28 days, Standard Discharge	
IEC Cycle Life	Cycle	≥ 500	IEC285(1993)4.4.1	(see Note 3)
Accelerated Cycle Life	Cycle	≥ 400	Charge:350mA(0.5C) Discharge: 700mA(1C) To 1.0V/cell, end-of:80% nominal capacity	Cycling charging cut-off condition: - $\Delta V=0\sim 5\text{mV/cell}$ and Timer cut-off=110% Nominal capacity Input and Temp.cutoff=55 $^{\circ}\text{C}$
Leakage		No leakage nor deformation	Fully charged at :350mA(0.5C) for 2.4hrs Stand for 14 days	
Vibration Resistance		Change of voltage should be under 0.02V/cell,Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs,then leave for 24hrs,check Battery before/after vibration, Amplitude 1.5mm Vibration 3000 CPM Any direction for 60mins.	
Impact Resistance		Change of voltage sho-uld be under 0.02V/cell Change of impedance should be under 5 milli-ohm/cell	Charge the battery 0.1C 14hrs Then leave for 24hrs,check bat-before/after dropped, Height 50cm Wooden board(thickness 30mm) Direction not specified,3 times.	

AA Portable Power Corp.

Document Number:

Revision: 3

Document Title: Product Specification of Ni-MH- AAA800 Cells

Page 3 of 3

5、 CONFIGURATION, DIMENSIONS AND MARKINGS

Please refer to the attached drawing.

6、 EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

7、 WARRANTY

3 months limited warranty against workmanship and material defects.

8、 CAUTION

- (1)Reverse charging is not acceptable.
 - (2)Charge before use. The cells/batteries are delivered in an uncharged state.
 - (3)Do not charge/discharge with more than our specified current.
 - (4)Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
 - (5)Do not incinerate or mutilate the cell/battery.
 - (6)Do not solder directly to the cell/battery.
 - (7)the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
 - (8)store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.
-

Notes:


- (1) T_1 : Ambient Temperature.
- (2) Approximate charge time from discharged state, for reference only.
- (3) IEC285(1993)4.4.1 Cycle Life:

Cycle No.	Charge	Rest	Discharge
1	$0.1C \times 16h$	None	$0.25C \times 2h20min$
2-48	$0.25C \times 3h10min$	None	$0.25C \times 2h20min$
49	$0.25C \times 3h10min$	None	$0.25C$ to $1.0V/cell$
50	$0.1C \times 16h$	1-4h	$0.2C$ to $1.0V/cell$
Cycles 1 to so shall be repeated until the discharge duration on any 50 th Cycle becomes less than 3 h.			

AA Portable Power Corp.

MODEL No: MH-AAA800 Flat top


Description: 800mAh AAA SIZE Ni-MH

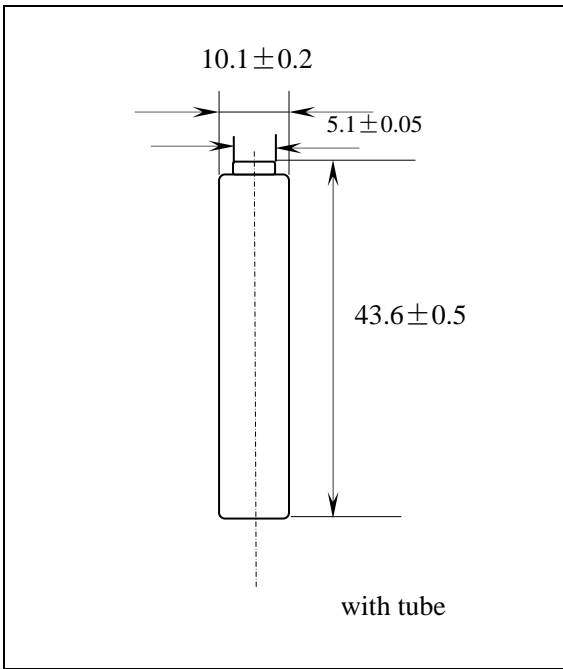


Specification

Nominal Capacity		800 mAh	
Nominal Voltage		1.2 V	
Charge current	Standard	80mA	
	Quick	240mA	
	Fast	400mA	
Charge time	Standard	14~16 Hrs	
	Quick	4.0 Hrs	
	Fast	2.4Hrs	
Ambient Temperature	Charge	Standard	0°C~45°C
		Quick	10°C~45°C
		Fast	10°C~45°C
	Discharge		-30°C~60°C
	Storage		-30°C~65°C
Internal Impedance(mΩ) (After Charge)		32	
Weight		14g	


Charge(充电)

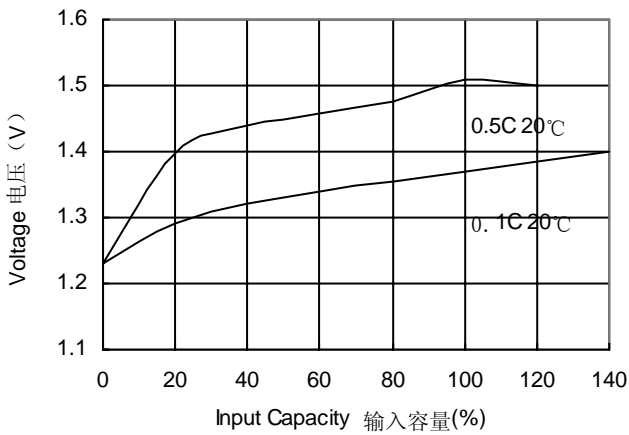

Discharge at high rate(高倍率放电)

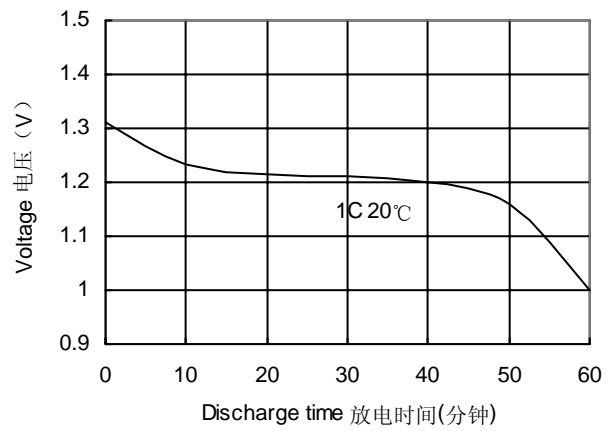

Discharge at low rate(低倍率放电)

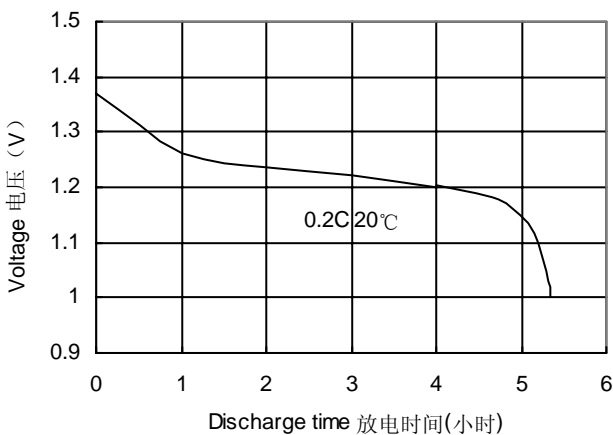

Charge Retention(荷电保持能力)

